




Isle 01A  
 L 32 x W 3 x H 4 in  
 L 810 x W 76 x H 107 mm  
 Total height variable




Isle 01B  
 L 32 x W 3 x H 7.25 in  
 L 810 x W 76 x H 184 mm  
 Total height variable




Isle 02A  
 L 45 x W 3 x H 4 in  
 L 1140 x W 76 x H 107 mm  
 Total height variable




Isle 02B  
 L 45 x W 3 x H 7.25 in  
 L 1140 x W 76 x H 184 mm  
 Total height variable

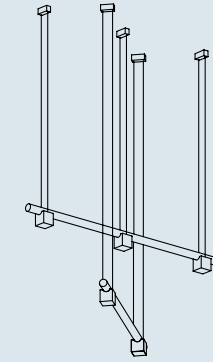


Isle 10  
 L 58 x W 30 x H 24 in  
 L 1480 x W 760 x H 610 mm  
 Total height variable

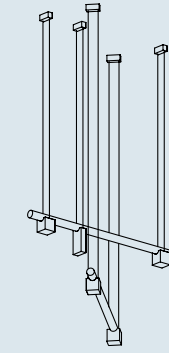


Isle 11  
 L 45 x W 32 x H 22 in  
 L 1140 x W 800 x H 546 mm  
 Total height variable

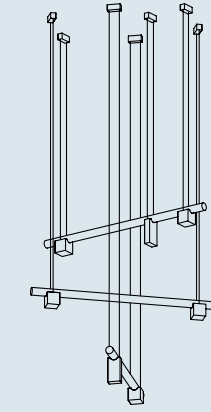


Isle 12  
 L 45 x W 35 x H 44 in  
 L 1140 x W 880 x H 1120 mm  
 Total height variable

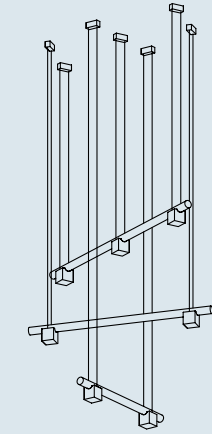


Isle 13  
 L 58 x W 30 x H 44 in  
 L 1480 x W 760 x H 1120 mm  
 Total height variable




Isle 03A  
 L 58 x W 3 x H 4 in  
 L 1480 x W 76 x H 107 mm  
 Total height variable




Isle 03B  
 L 58 x W 3 x H 7.25 in  
 L 1480 x W 76 x H 184 mm  
 Total height variable

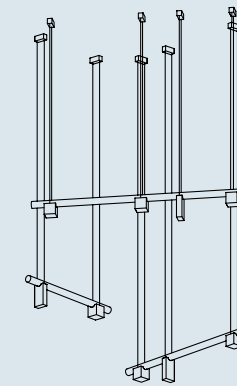

Isle 14  
 L 61 x W 33 x H 43 in  
 L 810 x W 790 x H 1080 mm  
 Total height variable



Isle 15  
 L 98 x W 3 x H 7.25 in  
 L 2500 x W 76 x H 184 mm  
 Total height variable



Isle 16  
 L 95 x W 17 x H 29 in  
 L 2420 x W 432 x H 730 mm  
 Total height variable

**Finishes**

Materials : Aluminum or marble blocks and slabs, frosted glass tube, polished aluminum end cap and anchors  
 Source: LED array, dimmable







# Isle 01








ISLE01A



ISLE01B


An ode to quiet strength, Isle is a play both on illusion and perception allowing lightness to anchor and foundations to rise. Composed of a delicate glass tube resting on solid-stone and aluminum pedestals and suspended in mid-air like a surreal bridge, Isle is minimal, but never simplistic.

<b>TYPE</b>	Suspension
<b>CONSTRUCTION</b>	Frosted glass tube Polished aluminum or marble block and slab Polished aluminum endcap, canopy and anchors Polyester cord
<b>SPECIFICATIONS</b>	Power consumption: 24W  Colour temperature: 3000K 2700K dim to warm 3000K to 2200K dim to warm 2700K to 2200K  Lumen output: 2700K - 1314 lm  Colour rendering index: $\geq 90$ CRI Colour consistency: 3 SDCM Expected lifetime: $\geq 50\ 000$ h
<b>CONTROL</b>	120/277V on/off, 0-10V, or phase dimming 220-240V: On/Off, Phase Dimming, DALI Refer to our recommended list of dimmer models on page 6
<b>CORD LENGTH</b>	Mains/line cords- 120" / 304 cm Non-electrical cords- 96" / 244 cm
<b>WEIGHT</b>	ISL01A- 12lb / 5.4Kg ISL01B- 12lb / 5.4Kg
<b>CERTIFICATIONS</b>	     IP20
<b>WARRANTY</b>	2 years


## NOTES

- The canopy can be offset from composition.
- Luminaire total height (ceiling to lowest point of luminaire). Luminaire height is adjustable on site. (96" / 244 cm ribbon provided)  
Min - 12" / 30 cm  
Max - 102" / 259 cm  
\*For any height outside these parameters, contact Lambert & Fils
- For installation on slanted ceiling, contact Lambert & Fils
- Ceiling anchors can be used as junction boxes for daisy chain. If needed, please inform your representative.
- Dimensions are approximate and may vary slightly


### ISLE01A

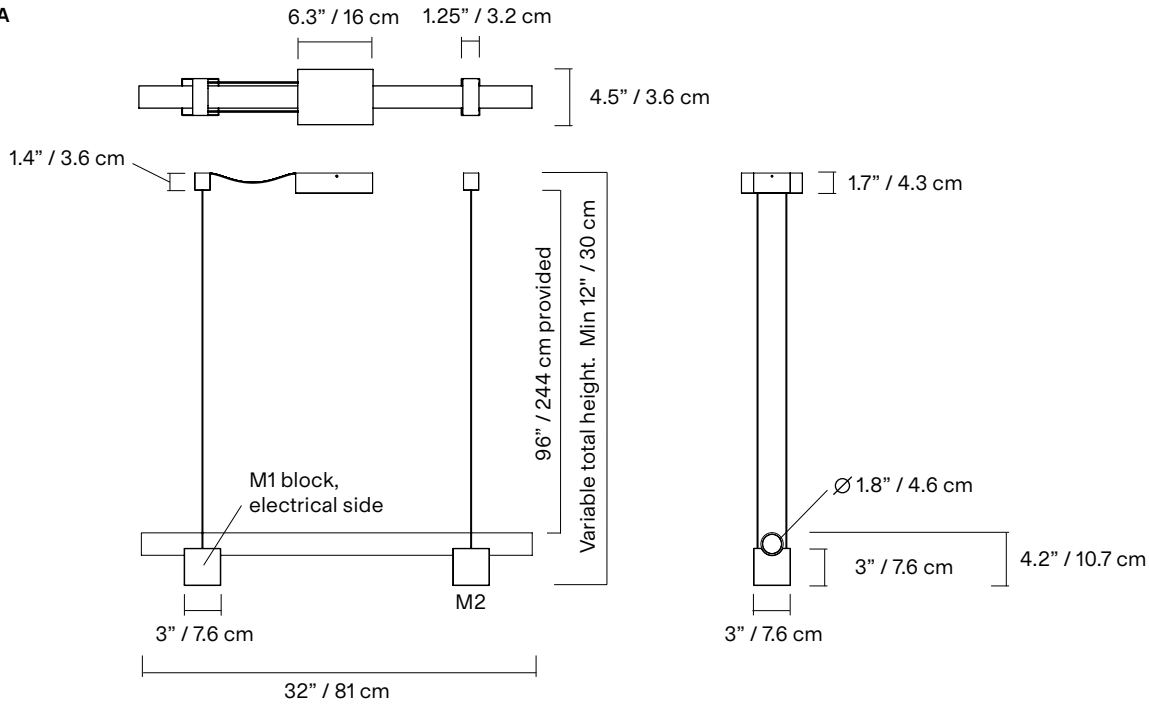


### ISLE01B

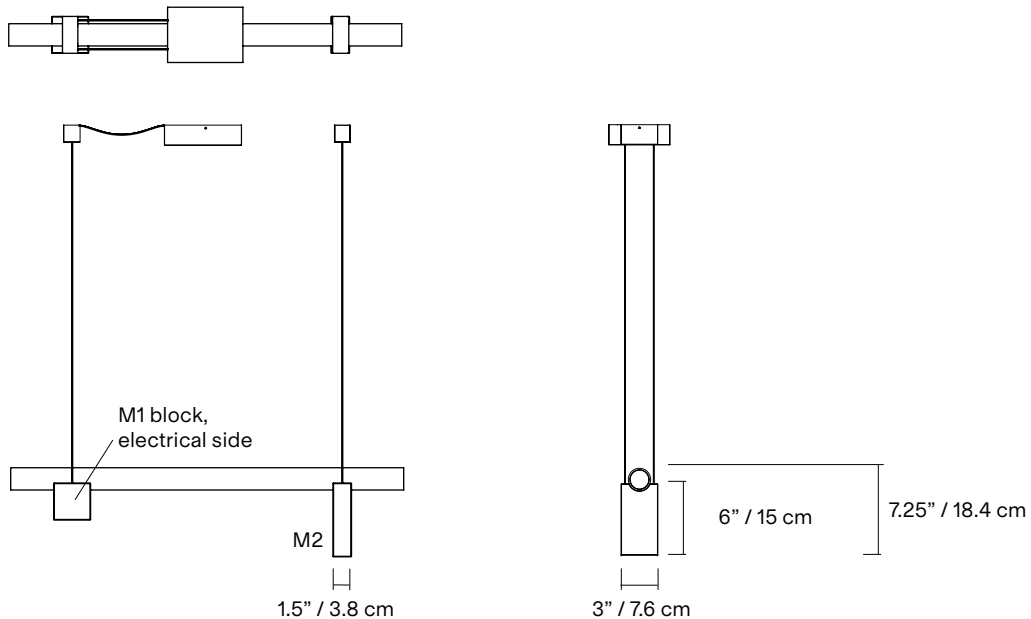

## SM- Surface mounted

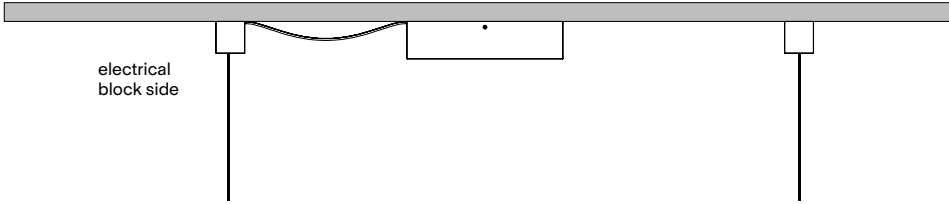

## RM-Remote driver

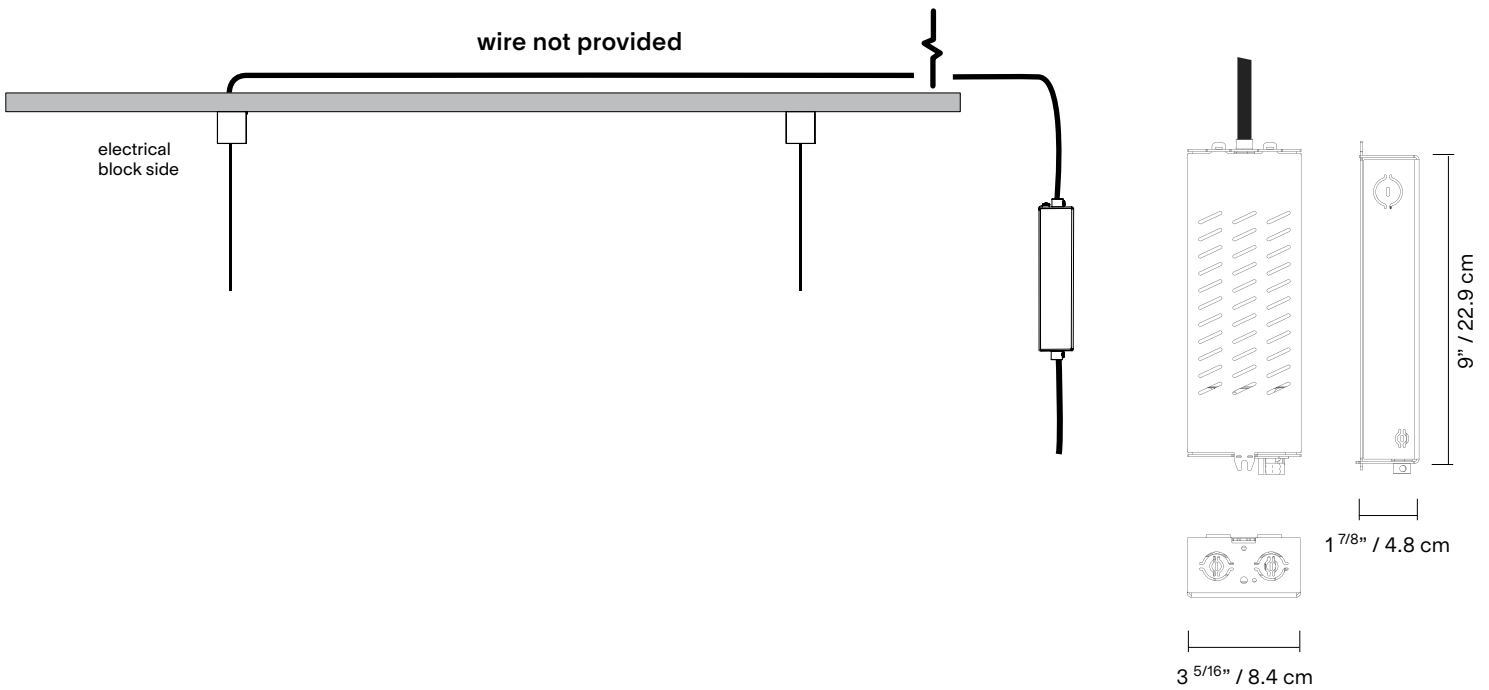

\*housing not necessary for  
Phase Dimming 220-240VAC  
(only driver provided)

## REMOTE DRIVER HOUSING

Must be accessible for maintenance in a well aerated location for heat dissipation

Use the following chart to determine proper wiring gauge according to the distance to its location.

### GAUGE

18AWG (0.75mm<sup>2</sup>)  
16AWG (1.5mm<sup>2</sup>)  
14AWG (2.5mm<sup>2</sup>)  
12AWG (4mm<sup>2</sup>)

### MAX ALLOWABLE DISTANCE

85 ft. / (26 m)  
136 ft. / (41 m)  
216 ft. / (66 m)  
343 ft. / (105 m)

## MATERIAL



**AL**  
Polished  
aluminum



**BM**  
Black  
marquina  
marble



**GU**  
Guatemala  
green  
marble



**PI**  
Pink  
portugal  
marble



**RL**  
Red  
levanto  
marble



**RN**  
Red  
negrais  
marble


## CORD




**BK**  
Black

## MOUNTING

**SM**  
Surface mounted



**RM**  
Remote Driver




## NOTES


- Must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- Not protected against liquids (refer to IP20)
- Additional charges for modifications or for special orders
- Please refer to maintenance sheet on our website for cleaning instructions

## LAMP ANATOMY

ISL01A

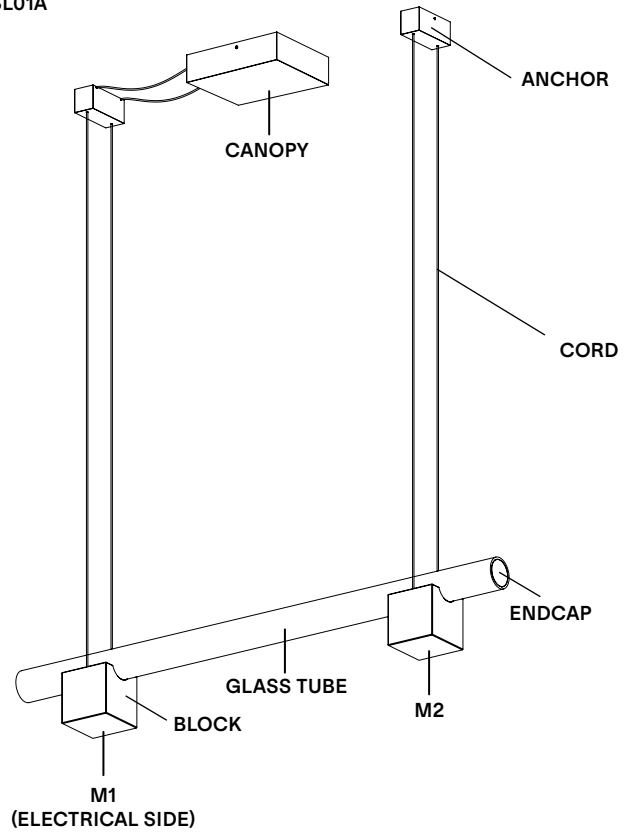

ISL01B

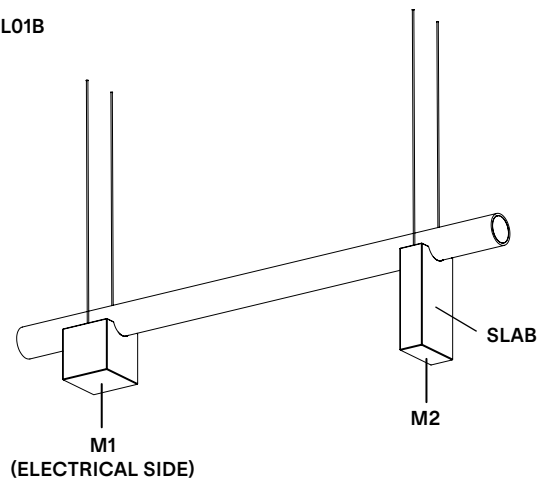

		Example	Fill with your selection
<b>COLLECTION</b>	<b>ISL</b> Isle	ISL	ISL
<b>MODEL</b>	<b>01</b>	01	<b>01</b>
<b>CONFIGURATION</b>	<b>A</b> <b>B</b>	A	
<b>MATERIAL 1 - M1</b> <b>ELECTRICAL BLOCK</b>	<b>AL</b> Polished Aluminum <b>BM</b> Black Marquina marble <b>GU</b> Guatemala Green marble <b>PI</b> Pink Portugal marble <b>RL</b> Red Levanto marble <b>RN</b> Red Negrais marble	AL	
<b>MATERIAL 2 - M2</b>	<b>AL</b> Polished Aluminum <b>BM</b> Black Marquina marble <b>GU</b> Guatemala Green marble <b>PI</b> Pink Portugal marble <b>RL</b> Red Levanto marble <b>RN</b> Red Negrais marble	AL	
<b>CORD</b>	<b>BK</b> Black	BK	<b>BK</b>
<b>CANOPY AND ANCHORS</b>	<b>AL</b> Polished aluminum	AL	<b>AL</b>
<b>MOUNTING</b>	<b>SM</b> Surface mounted <b>RM</b> Remote driver	SM	
<b>COLOUR TEMPERATURE (CCT)</b>	<b>WL</b> Warm light (2700K) <b>NL</b> Neutral light (3000K) <b>D27</b> Dim to warm (2700K-2200K) <b>D30</b> Dim to warm (3000K-2200K) <b>CCT</b> Other CCT available upon request*	WL	
<b>DIMMING</b>	<b>ZT</b> 0-10V (120VAC only) <b>PH</b> Phase dimming <b>DA</b> DALI (220-240VAC only)	ZT	
<b>FULL SKU</b>		ISL01AALALBKALSMWLZT	
		<b>NOTES</b>	

\*Specific CCT selection only available in 100k increments, from 2200K to 4000K inclusively and not available with Dim-to-Warm feature.



## TESTED DIMMER COMPATIBILITY LIST - 120V

Compatible with ELV dimming (Trailing Edge / Reverse Phase).

We strongly recommend using dimmers that require a Neutral wire connection.

DIMMER BRAND	MODEL	MAX LEVEL	MIN LEVEL	DIMMING PROTOCOL
Lutron	DVELV-300P	95%	5%	Phase Cut
Lutron	DVELV-303P	95%	5%	Phase Cut
Lutron	CTELV-303P	93%	4%	Phase Cut
Lutron	SELV-300P	97%	3%	Phase Cut
Lutron	SELV-303P	97%	3%	Phase Cut
Lutron	MA-PRO / companion (MA-R-WH)	99%	2%	Phase Cut
Lutron	PD-5NE	100%	5%	Phase Cut
Lutron	PD-6WCL	100%	5%	Phase Cut
Lutron	DVRP-253P	94%	3%	Phase Cut
Lutron	CTRP-253P	90%	2%	Phase Cut
Lutron	NTELV-300	94%	2%	Phase Cut

---

Some dimmers require a minimum load, check specifications.

---

We recommend conducting your own test before final installation.

---

# Isle 02








**ISLE02A**





**ISLE02B**

An ode to quiet strength, Isle is a play both on illusion and perception allowing lightness to anchor and foundations to rise. Composed of a delicate glass tube resting on solid-stone and aluminum pedestals and suspended in mid-air like a surreal bridge, Isle is minimal, but never simplistic.


<b>TYPE</b>	Suspension
<b>CONSTRUCTION</b>	Frosted glass tube Polished aluminum or marble block and slab Polished aluminum endcap, canopy and anchors Polyester cord
<b>SPECIFICATIONS</b>	Power consumption: 35W  Colour temperature: 3000K 2700K dim to warm 3000K to 2200K dim to warm 2700K to 2200K  Lumen output: 2700K - 1877 lm  Colour rendering index: ≥90 CRI Colour consistency: 3 SDCM Expected lifetime: ≥50 000h
<b>CONTROL</b>	120/277V on/off, 0-10V, or phase dimming 220-240V: On/Off, Phase Dimming, DALI Refer to our recommended list of dimmer models on page 6
<b>CORD LENGTH</b>	Mains/line cords- 120" / 304 cm Non-electrical cords- 96" / 244 cm
<b>WEIGHT</b>	ISL02A- 13.5lb / 6.1Kg ISL02B- 16.5lb / 7.5Kg
<b>CERTIFICATIONS</b>	     IP20
<b>WARRANTY</b>	2 years

## NOTES


- The canopy can be offset from composition.
- Luminaire total height (ceiling to lowest point of luminaire). Luminaire height is adjustable on site.  
Min - 12"/30 cm  
Max - 102"/259 cm  
\*For any height outside these parameters, contact Lambert & Fils
- For installation on slanted ceiling, contact Lambert & Fils
- Ceiling anchors can be used as junction boxes for daisy chain. If needed, please inform your representative.
- Dimensions are approximate and may vary slightly

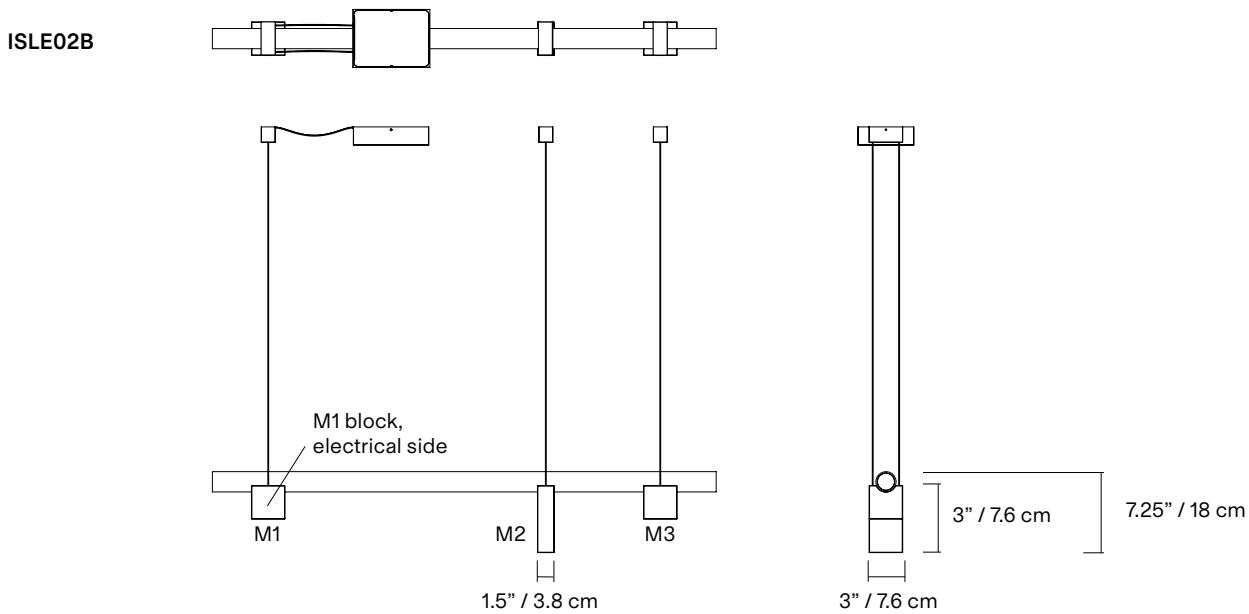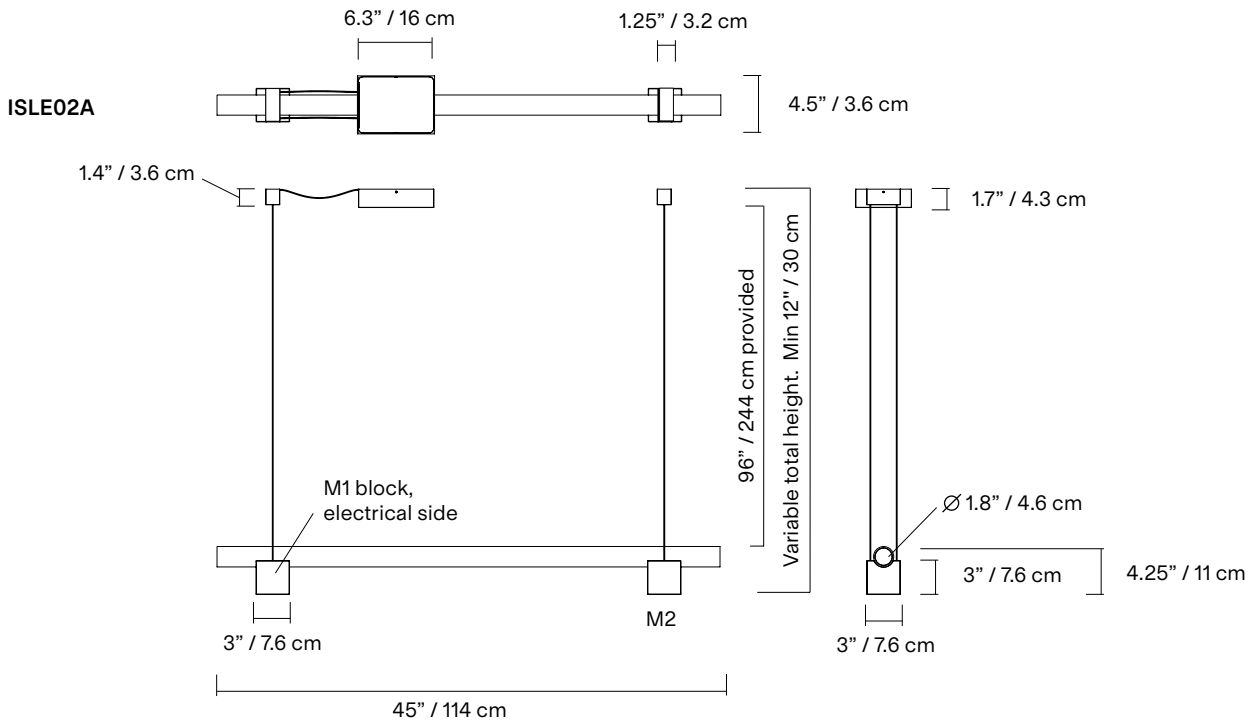

## SM- Surface mounted

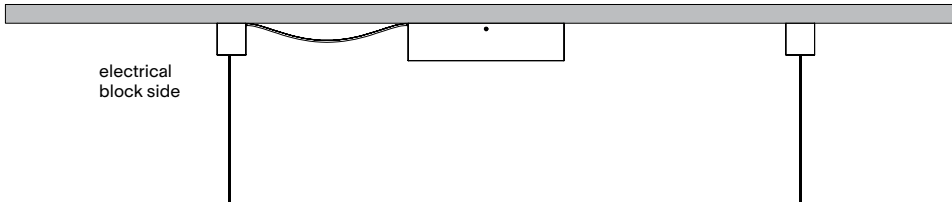

## RM-Remote driver

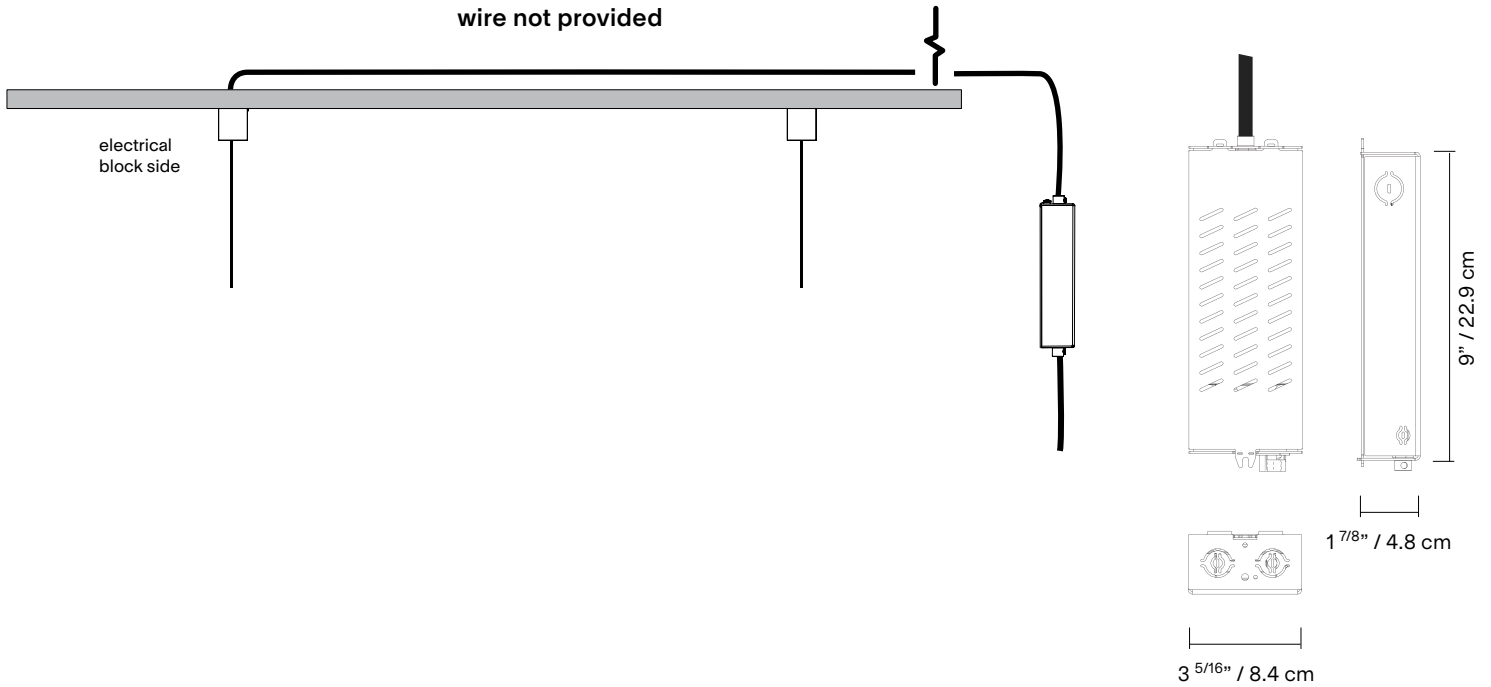

\*housing not necessary for Phase Dimming 220-240VAC (only driver provided)

## REMOTE DRIVER HOUSING

Must be accessible for maintenance in a well aerated location for heat dissipation

Use the following chart to determine proper wiring gauge according to the distance to its location.

### GAUGE

18AWG (0.75mm<sup>2</sup>)  
 16AWG (1.5mm<sup>2</sup>)  
 14AWG (2.5mm<sup>2</sup>)  
 12AWG (4mm<sup>2</sup>)

### MAX ALLOWABLE DISTANCE

85 ft. / (26 m)  
 136 ft. / (41 m)  
 216 ft. / (66 m)  
 343 ft. / (105 m)

## MATERIAL



**AL**  
Polished  
aluminum



**BM**  
Black  
Marquina  
marble



**GU**  
Guatemala  
green  
marble



**PI**  
Pink  
Portugal  
marble



**RL**  
Red  
Levanto  
marble



**RN**  
Red  
Negrais  
marble


## CORD



**BK**  
Black

## MOUNTING

**SM**  
Surface mounted



**RM**  
Remote Driver




## NOTES


- Must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- Not protected against liquids (refer to IP20)
- Additional charges for modifications or for special orders
- Please refer to maintenance sheet on our website for cleaning instructions

## LAMP ANATOMY

### ISL02A

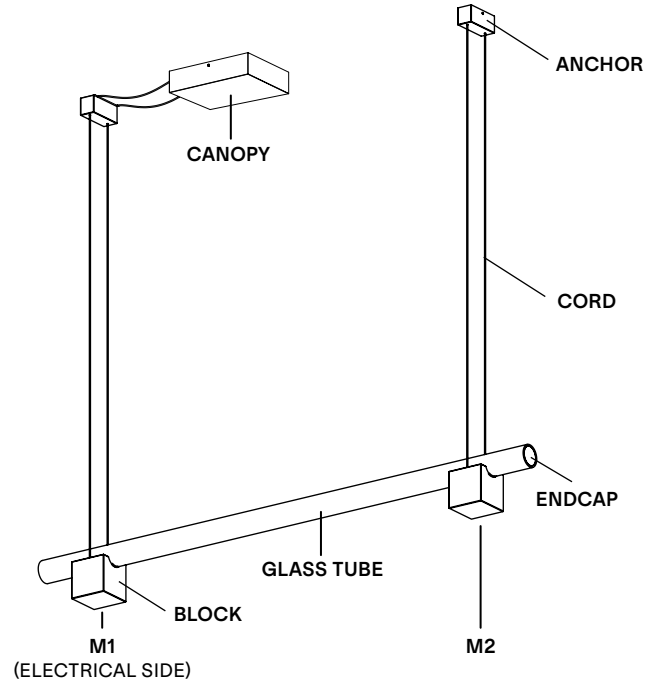

### ISL02B

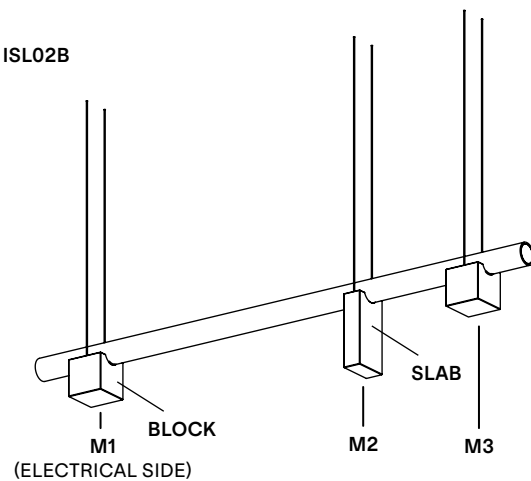

		Example	Fill with your selection
<b>COLLECTION</b>	<b>ISL</b> Isle	<b>ISL</b>	<b>ISL</b>
<b>MODEL</b>	<b>02</b>	<b>02</b>	<b>02</b>
<b>CONFIGURATION</b>	<b>A</b> <b>B</b>	<b>A</b>	
<b>MATERIAL 1 - M1</b> <b>ELECTRICAL BLOCK</b>	<b>AL</b> Polished Aluminum <b>BM</b> Black Marquina marble <b>GU</b> Guatemala Green marble <b>PI</b> Pink Portugal marble <b>RL</b> Red Levanto marble <b>RN</b> Red Negrais marble	<b>AL</b>	
<b>MATERIAL 2 - M2</b>	<b>AL</b> Polished Aluminum <b>BM</b> Black Marquina marble <b>GU</b> Guatemala Green marble <b>PI</b> Pink Portugal marble <b>RL</b> Red Levanto marble <b>RN</b> Red Negrais marble	<b>AL</b>	
<b>MATERIAL 3 - M3*</b> <b>*ONLY FOR B CONFIGURATION</b>	<b>AL</b> Polished Aluminum <b>BM</b> Black Marquina marble <b>GU</b> Guatemala Green marble <b>PI</b> Pink Portugal marble <b>RL</b> Red Levanto marble <b>RN</b> Red Negrais marble	<b>AL</b>	
<b>CORD</b>	<b>BK</b> Black	<b>BK</b>	<b>BK</b>
<b>CANOPY AND ANCHORS</b>	<b>AL</b> Polished aluminum	<b>AL</b>	<b>AL</b>
<b>MOUNTING</b>	<b>SM</b> Surface mounted <b>RM</b> Remote driver	<b>SM</b>	
<b>COLOUR TEMPERATURE (CCT)</b>	<b>WL</b> Warm light (2700K) <b>NL</b> Neutral light (3000K) <b>D27</b> Dim to warm (2700K-2200K) <b>D30</b> Dim to warm (3000K-2200K) <b>CCT</b> Other CCT available upon request**	<b>WL</b>	
<b>DIMMING</b>	<b>ZT</b> 0-10V (120VAC only) <b>PH</b> Phase dimming <b>DA</b> DALI (220-240VAC only)	<b>ZT</b>	
<b>FULL SKU</b>		<b>ISL02AALALBKALSMWLZT</b>	

**NOTES**

\*\*Specific CCT selection only available in 100k increments, from 2200K to 4000K inclusively and not available with Dim-to-Warm feature.

## TESTED DIMMER COMPATIBILITY LIST - 120V

Compatible with ELV dimming (Trailing Edge / Reverse Phase).

We strongly recommend using dimmers that require a Neutral wire connection.

DIMMER BRAND	MODEL	MAX LEVEL	MIN LEVEL	DIMMING PROTOCOL
Lutron	DVELV-300P	95%	5%	Phase Cut
Lutron	DVELV-303P	95%	5%	Phase Cut
Lutron	CTELV-303P	93%	4%	Phase Cut
Lutron	SELV-300P	97%	3%	Phase Cut
Lutron	SELV-303P	97%	3%	Phase Cut
Lutron	MA-PRO / companion (MA-R-WH)	99%	2%	Phase Cut
Lutron	PD-5NE	100%	5%	Phase Cut
Lutron	PD-6WCL	100%	5%	Phase Cut
Lutron	DVRP-253P	94%	3%	Phase Cut
Lutron	CTRP-253P	90%	2%	Phase Cut
Lutron	NTELV-300	94%	2%	Phase Cut

---

Some dimmers require a minimum load, check specifications.

---

We recommend conducting your own test before final installation.

---

# Isle 03








ISLE03A



ISLE03B

An ode to quiet strength, Isle is a play both on illusion and perception allowing lightness to anchor and foundations to rise. Composed of a delicate glass tube resting on solid-stone and aluminum pedestals and suspended in mid-air like a surreal bridge, Isle is minimal, but never simplistic.


<b>TYPE</b>	Suspension
<b>CONSTRUCTION</b>	Frosted glass tube Polished aluminum or marble block and slab Polished aluminum endcap, canopy and anchors Polyester cord
<b>SPECIFICATIONS</b>	Power consumption: 45W  Colour temperature: 3000K 2700K dim to warm 3000K to 2200K dim to warm 2700K to 2200K  Lumen output: 2700K - 2439 lm  Colour rendering index: $\geq 90$ CRI Colour consistency: 3 SDCM Expected lifetime: $\geq 50\ 000$ h
<b>CONTROL</b>	120/277V on/off, 0-10V, or phase dimming 220-240V: On/Off, Phase Dimming, DALI Refer to our recommended list of dimmer models on page 6
<b>CORD LENGTH</b>	Mains/line cords- 120" / 304 cm Non-electrical cords- 96" / 244 cm
<b>WEIGHT</b>	ISL03A- 17.5lb / 7.9Kg ISL03B- 20.5lb / 9.3Kg
<b>CERTIFICATIONS</b>	     IP20
<b>WARRANTY</b>	2 years




## NOTES

- The canopy can be offset from composition.
- Luminaire total height (ceiling to lowest point of luminaire). Luminaire height is adjustable on site.  
Min - 12"/30 cm  
Max - 102"/259 cm  
\*For any height outside these parameters, contact Lambert & Fils
- For installation on slanted ceiling, contact Lambert & Fils
- Ceiling anchors can be used as junction boxes for daisy chain. If needed, please inform your representative.
- Dimensions are approximate and may vary slightly


The canopy cannot be installed in the center of the proposed composition.

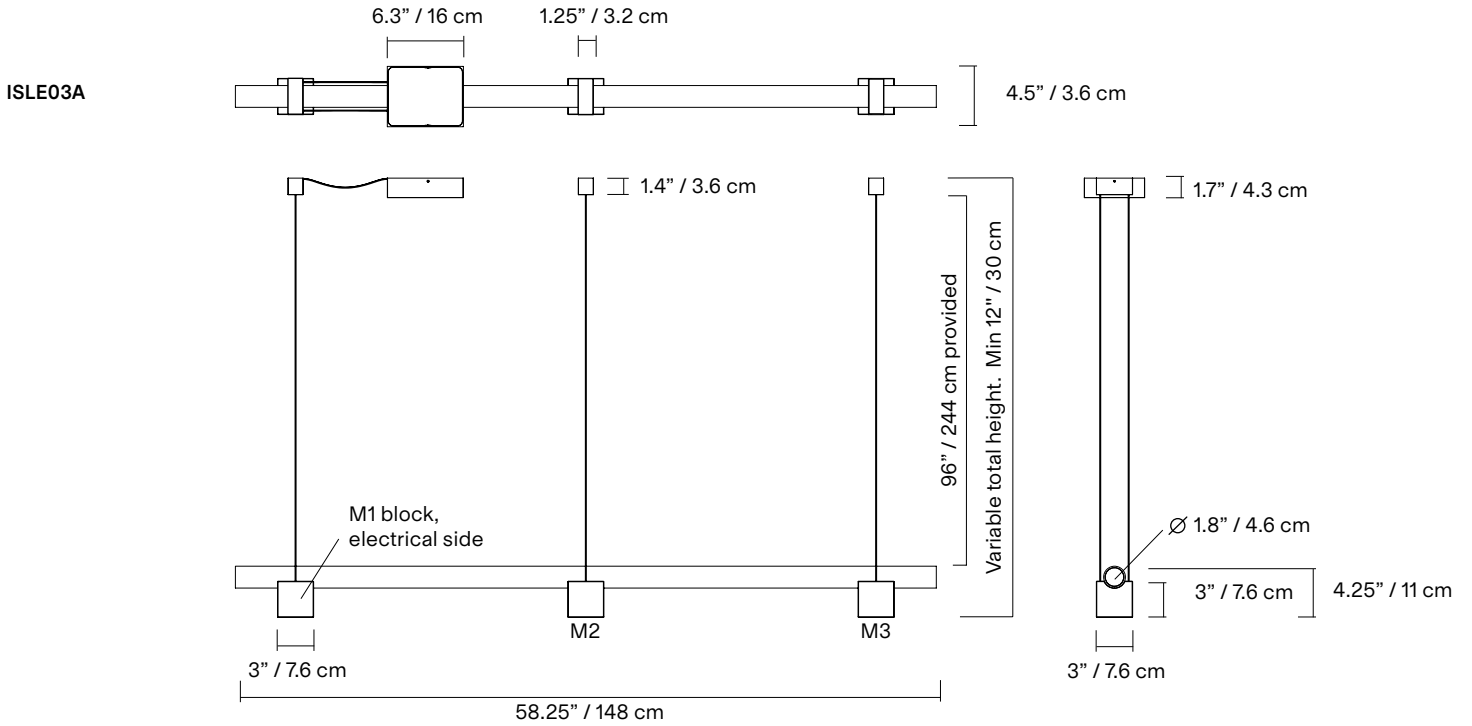


The canopy cannot be installed in the center of the proposed composition.

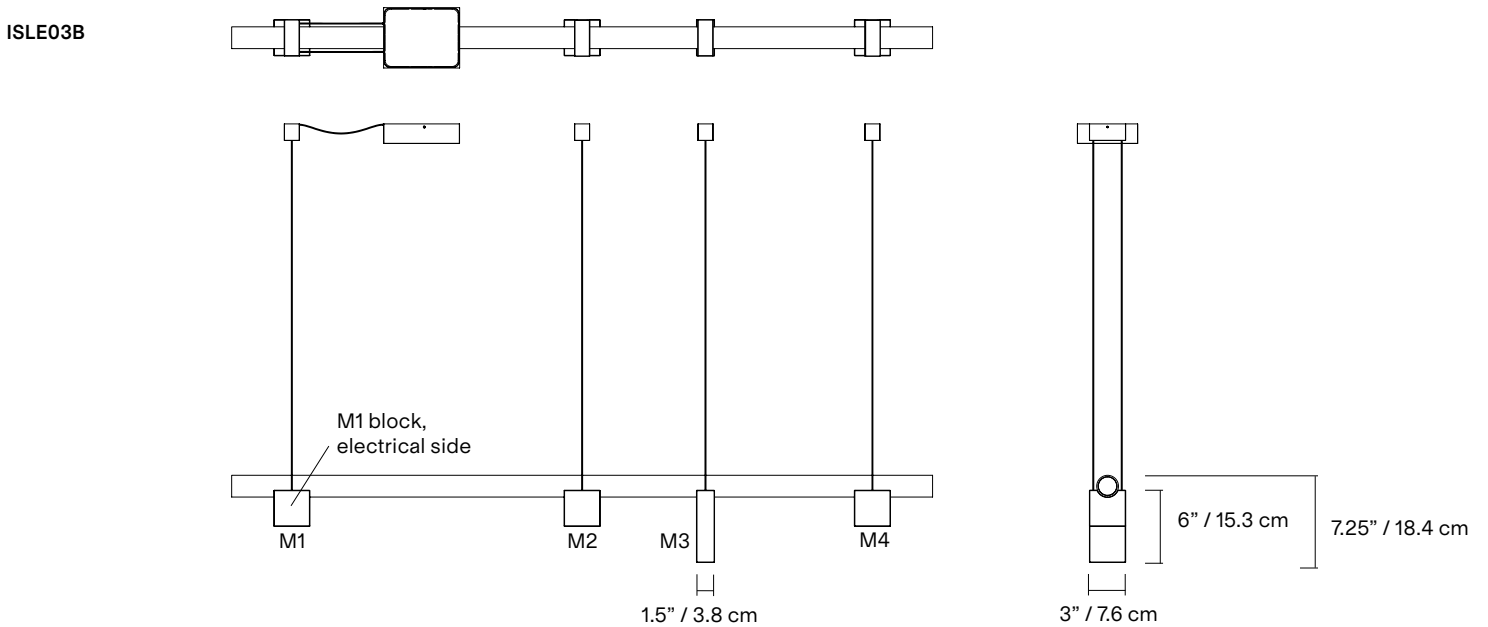




## SM- Surface mounted

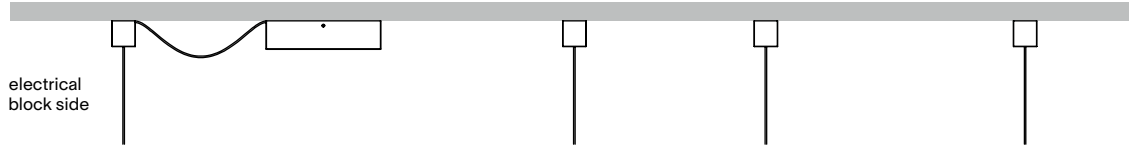

## DC- Daisy chain (only for Isle 03B)

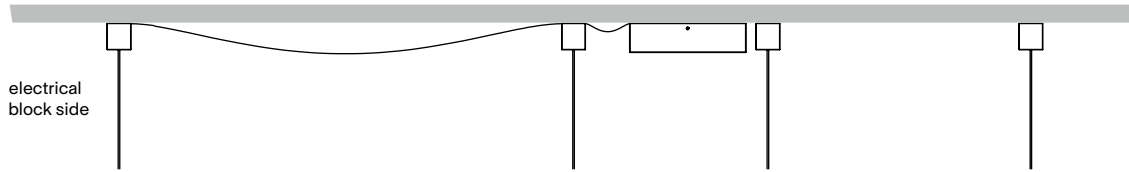

## RM-Remote driver

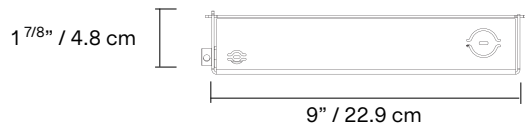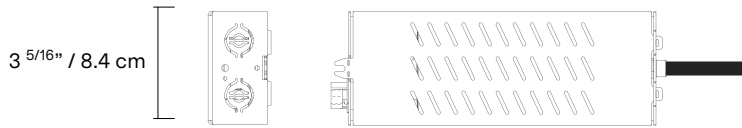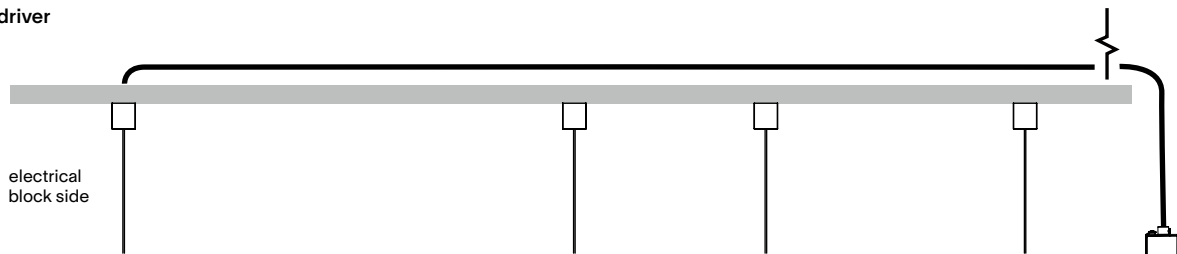

\*housing not necessary for Phase Dimming 220-240VAC (only driver provided)

## REMOTE DRIVER HOUSING

Must be accessible for maintenance in a well aerated location for heat dissipation

Use the following chart to determine proper wiring gauge according to the distance to its location.

### GAUGE

18AWG (0.75mm<sup>2</sup>)  
 16AWG (1.5mm<sup>2</sup>)  
 14AWG (2.5mm<sup>2</sup>)  
 12AWG (4mm<sup>2</sup>)

### MAX ALLOWABLE DISTANCE

85 ft. / (26 m)  
 136 ft. / (41 m)  
 216 ft. / (66 m)  
 343 ft. / (105 m)

## MATERIAL\*



**AL**  
Polished  
aluminum



**BM**  
Black  
Marquina  
marble



**GU**  
Guatemala  
green  
marble



**PI**  
Pink  
Portugal  
marble



**RL**  
Red  
Levanto  
marble



**RN**  
Red  
Negrais  
marble


## CORD




**BK**  
Black

## MOUNTING


**SM**  
Surface mounted



**DC**  
Daisy chain  
(only for Isle 03B)





**RM**  
Remote Driver



## NOTES

- Must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- Not protected against liquids (refer to IP20)
- Additional charges for modifications or for special orders
- Please refer to maintenance sheet on our website for cleaning instructions
- \*All marble colours and vein patterns are unique to each block.

## LAMP ANATOMY

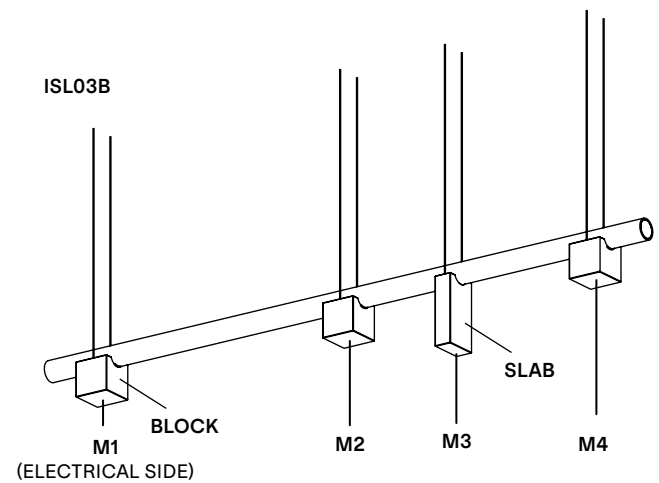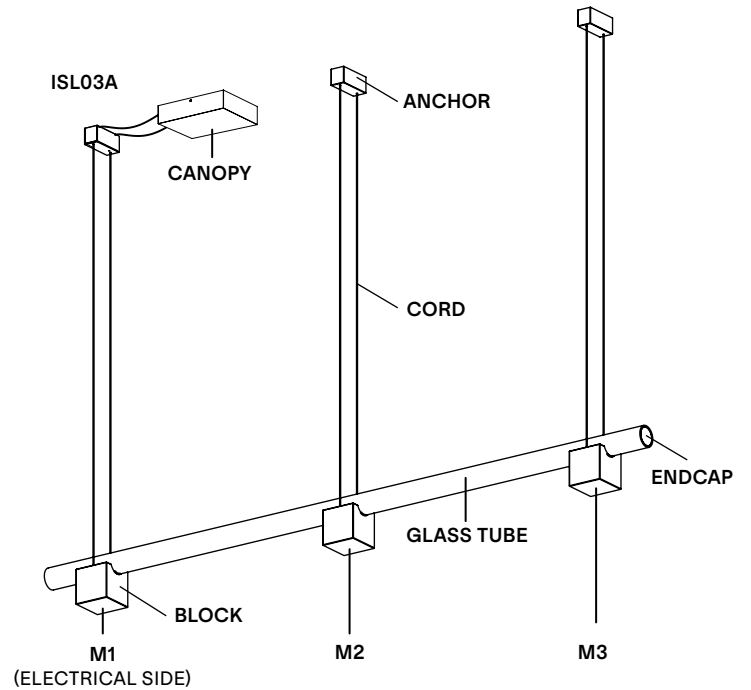

		Example	Fill with your selection
<b>COLLECTION</b>	<b>ISL</b> Isle	<b>ISL</b>	<b>ISL</b>
<b>MODEL</b>	<b>03</b>	<b>03</b>	<b>03</b>
<b>CONFIGURATION</b>	<b>A</b> <b>B</b>	<b>A</b>	
<b>MATERIAL 1 - M1</b> <b>ELECTRICAL BLOCK</b>	<b>AL</b> Polished Aluminum <b>BM</b> Black Marquina marble <b>GU</b> Guatemala Green marble <b>PI</b> Pink Portugal marble <b>RL</b> Red Levanto marble <b>RN</b> Red Negrais marble	<b>AL</b>	
<b>MATERIAL 2 - M2</b>	<b>AL</b> Polished Aluminum <b>BM</b> Black Marquina marble <b>GU</b> Guatemala Green marble <b>PI</b> Pink Portugal marble <b>RL</b> Red Levanto marble <b>RN</b> Red Negrais marble	<b>AL</b>	
<b>MATERIAL 3 - M3</b>	<b>AL</b> Polished Aluminum <b>BM</b> Black Marquina marble <b>GU</b> Guatemala Green marble <b>PI</b> Pink Portugal marble <b>RL</b> Red Levanto marble <b>RN</b> Red Negrais marble	<b>AL</b>	
<b>MATERIAL 4 - M4*</b> <b>*ONLY FOR B CONFIGURATION</b>	<b>AL</b> Polished Aluminum <b>BM</b> Black Marquina marble <b>GU</b> Guatemala Green marble <b>PI</b> Pink Portugal marble <b>RL</b> Red Levanto marble <b>RN</b> Red Negrais marble	<b>AL</b>	
<b>CORD</b>	<b>BK</b> Black	<b>BK</b>	<b>BK</b>
<b>CANOPY AND ANCHORS</b>	<b>AL</b> Polished aluminum	<b>AL</b>	<b>AL</b>
<b>MOUNTING</b>	<b>SM</b> Surface mounted <b>DC</b> Daisy chain (only for Isle 03B) <b>RM</b> Remote driver	<b>SM</b>	
<b>COLOUR TEMPERATURE (CCT)</b>	<b>WL</b> Warm light (2700K) <b>NL</b> Neutral light (3000K) <b>D27</b> Dim to warm (2700K-2200K) <b>D30</b> Dim to warm (3000K-2200K) <b>CCT</b> Other CCT available upon request**	<b>WL</b>	
<b>DIMMING</b>	<b>ZT</b> 0-10V (120VAC only) <b>PH</b> Phase dimming <b>DA</b> DALI (220-240VAC only)	<b>ZT</b>	
<b>FULL SKU</b>		<b>ISL03AALALALBKALSMWLZT</b>	
		<b>NOTES</b>	

\*\*Specific CCT selection only available in 100k increments, from 2200K to 4000K inclusively and not available with Dim-to-Warm feature.

## TESTED DIMMER COMPATIBILITY LIST - 120V

Compatible with ELV dimming (Trailing Edge / Reverse Phase).

We strongly recommend using dimmers that require a Neutral wire connection.

DIMMER BRAND	MODEL	MAX LEVEL	MIN LEVEL	DIMMING PROTOCOL
Lutron	DVELV-300P	95%	5%	Phase Cut
Lutron	DVELV-303P	95%	5%	Phase Cut
Lutron	CTELV-303P	93%	4%	Phase Cut
Lutron	SELV-300P	97%	3%	Phase Cut
Lutron	SELV-303P	97%	3%	Phase Cut
Lutron	MA-PRO / companion (MA-R-WH)	99%	2%	Phase Cut
Lutron	PD-5NE	100%	5%	Phase Cut
Lutron	PD-6WCL	100%	5%	Phase Cut
Lutron	DVRP-253P	94%	3%	Phase Cut
Lutron	CTRP-253P	90%	2%	Phase Cut
Lutron	NTELV-300	94%	2%	Phase Cut

---

Some dimmers require a minimum load, check specifications.

---

We recommend conducting your own test before final installation.

---

# Isle 11








## ISLE 11 - COLOUR PALETTE 1

ISL02B: Polished aluminum + Polished Aluminum + Black Marquina






ISL02A: Black Marquina + Polished Aluminum

An ode to quiet strength, Isle is a play both on illusion and perception allowing lightness to anchor and foundations to rise. Composed of a delicate glass tube resting on solid-stone and aluminum pedestals and suspended in mid-air like a surreal bridge, Isle is minimal, but never simplistic.


<b>TYPE</b>	Suspension
<b>CONSTRUCTION</b>	Frosted glass tube Polished aluminum or marble block Polished aluminum endcap, canopy and anchors Polyester cord
<b>SPECIFICATIONS</b>	Power consumption: 52W  Colour temperature: 3000K 2700K dim to warm 3000K to 2200K dim to warm 2700K to 2200K  Lumen output: 2700K - 2815 lm  Colour rendering index: ≥90 CRI Colour consistency: 3 SDCM Expected lifetime: ≥50 000h
<b>CONTROL</b>	120/277V on/off, 0-10V, or phase dimming 220-240V: On/Off, Phase Dimming, DALI Refer to our recommended list of dimmer models on page 6
<b>CORD LENGTH</b>	Mains/line cords- 120" / 304 cm Non-electrical cords- 96" / 244 cm
<b>WEIGHT</b>	ISL02A- 13.5lb / 6.1Kg ISL02B- 16.5lb / 7.5Kg
<b>CERTIFICATIONS</b>	     IP20
<b>WARRANTY</b>	2 years

## NOTES


- The canopy can be offset from composition.
- Luminaire total height (ceiling to lowest point of luminaire).  
Min - 29"/74 cm  
Max - 119"/302 cm  
\*For any height outside these parameters, contact Lambert & Fils.
- Luminaire height is adjustable on site.
- Luminaire cannot be installed on a slanted ceiling.
- Ceiling anchors can be used as junction boxes for daisy chain. If needed, please inform your representative.
- Dimensions are approximate and may vary slightly.

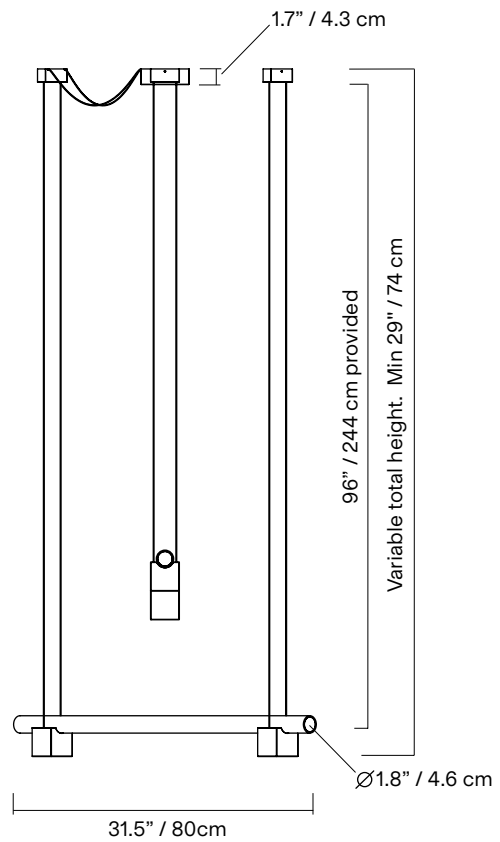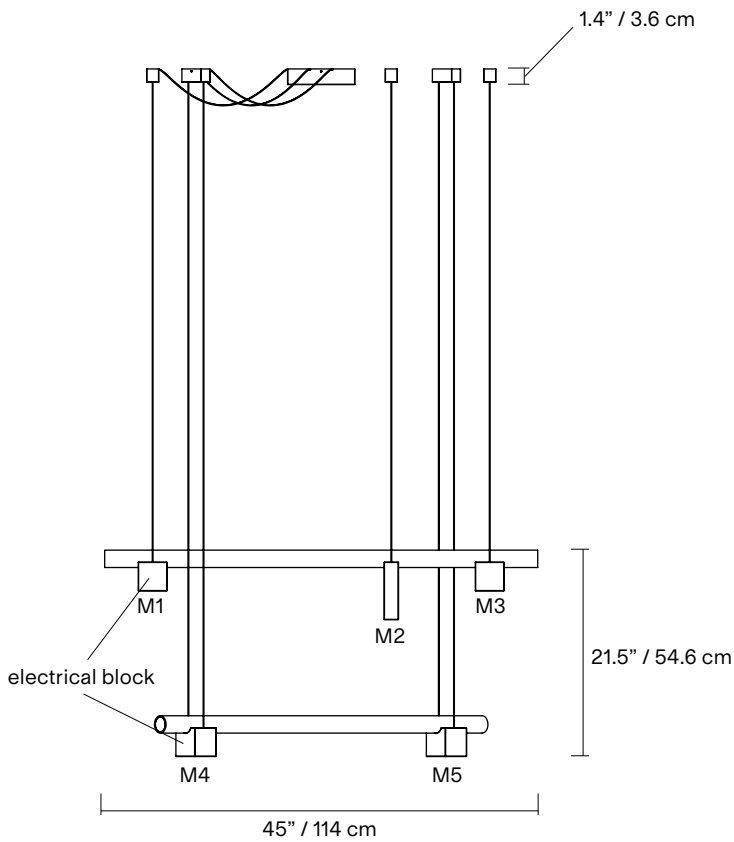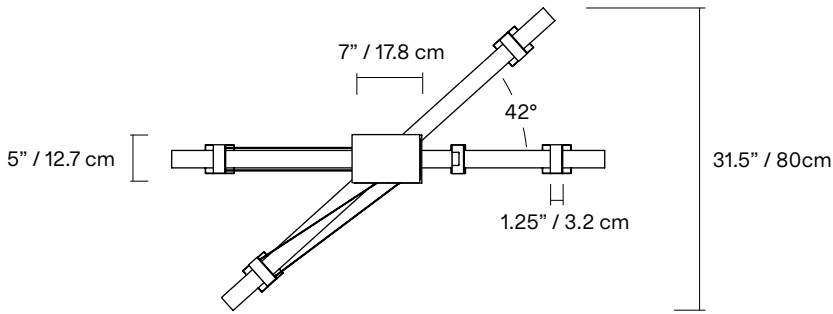

## SM- Surface mounted

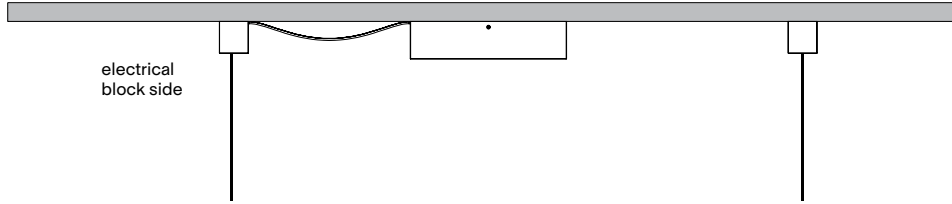

## RM-Remote driver

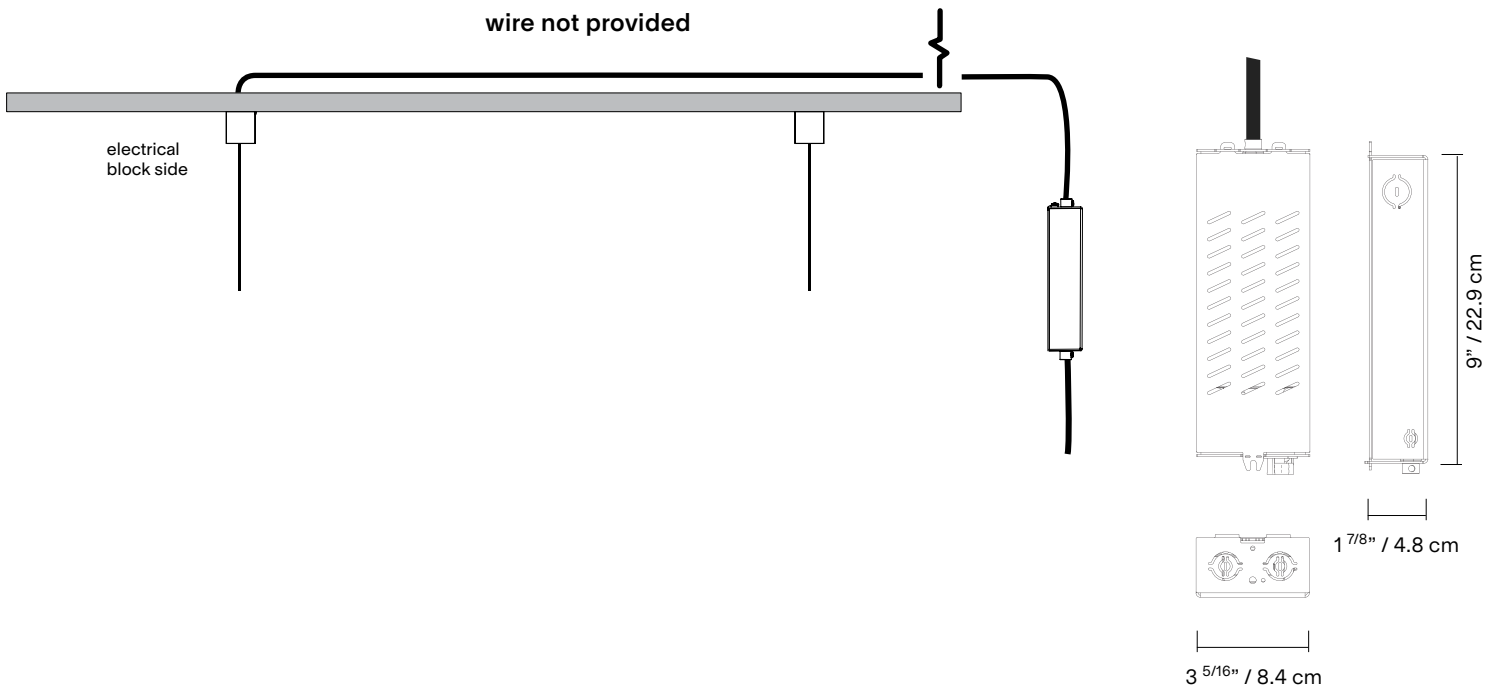

\*housing not necessary for Phase Dimming 220-240VAC (only driver provided)

### REMOTE DRIVER HOUSING

Must be accessible for maintenance in a well aerated location for heat dissipation

Use the following chart to determine proper wiring gauge according to the distance to its location.

### GAUGE

18AWG (0.75mm<sup>2</sup>)  
 16AWG (1.5mm<sup>2</sup>)  
 14AWG (2.5mm<sup>2</sup>)  
 12AWG (4mm<sup>2</sup>)

### MAX ALLOWABLE DISTANCE

85 ft. / (26 m)  
 136 ft. / (41 m)  
 216 ft. / (66 m)  
 343 ft. / (105 m)



## MATERIAL



**AL**  
Polished  
aluminum



**BM**  
Black  
marquina  
marble



**GU**  
Guatemala  
green  
marble



**PI**  
Pink  
portugal  
marble



**RL**  
Red  
levanto  
marble



**RN**  
Red  
negrais  
marble


## CORD



**BK**  
Black

## MOUNTING

**SM**  
Surface mounted




**RM**  
Remote Driver



## NOTES

- Must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- Not protected against liquids (refer to IP20)
- Additional charges for modifications or for special orders
- Please refer to maintenance sheet on our website for cleaning instructions

## LAMP ANATOMY

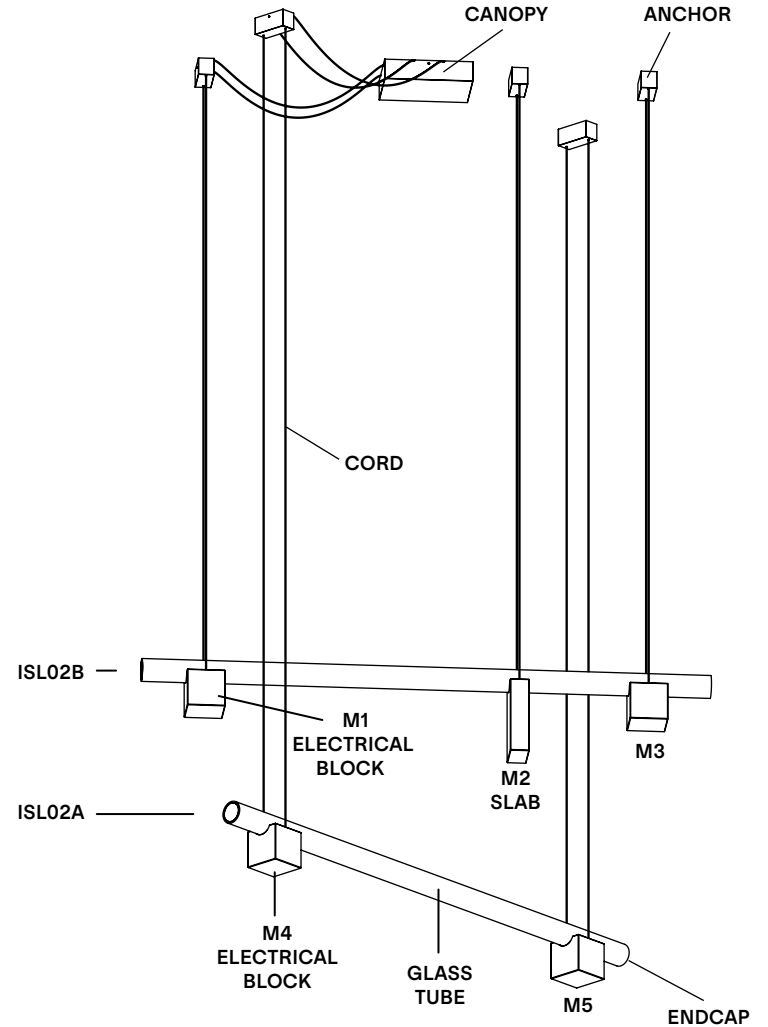

		Example	Fill with your selection
<b>COLLECTION</b>	<b>ISL</b> Isle	<b>ISL</b>	<b>ISL</b>
<b>MODEL</b>	<b>11</b>	<b>11</b>	<b>11</b>
<b>MATERIAL</b>	<b>P1</b> ISL02B - Black Marquina (M1) + Polished Aluminum (M2+M3) ISL02A - Polished Aluminum (M4) + Black Marquina (M5) <b>P2</b> ISL02B - Guatemala Green (M1) + Black Marquina (M2) + Polished Aluminum (M3) ISL02A - Polished Aluminum (M4) + Guatemala Green (M5) <b>P3</b> ISL02B - Red Negrais (M1) + Pink Portugal (M2) + Polished Aluminum (M3) ISL02A - Polished Aluminum (M4) + Red Negrais (M5) <b>P4</b> ISL02B - Pink Portugal (M1) + Red Levanto (M2) + Polished Aluminum (M3) ISL02A - Polished Aluminum (M4) + Red Levanto (M5)	<b>P1</b>	
<b>CORD</b>	<b>BK</b> Black	<b>BK</b>	<b>BK</b>
<b>CANOPY AND ANCHORS</b>	<b>AL</b> Polished aluminum	<b>AL</b>	<b>AL</b>
<b>MOUNTING</b>	<b>SM</b> Surface mounted <b>RM</b> Remote driver	<b>SM</b>	
<b>COLOUR TEMPERATURE (CCT)</b>	<b>WL</b> Warm light (2700K) <b>NL</b> Neutral light (3000K) <b>D27</b> Dim to warm (2700K-2200K) <b>D30</b> Dim to warm (3000K-2200K) <b>CCT</b> Other CCT available upon request*	<b>WL</b>	
<b>DIMMING</b>	<b>ZT</b> 0-10V (120VAC only) <b>PH</b> Phase dimming <b>DA</b> DALI (220-240VAC only)	<b>ZT</b>	
<b>FULL SKU</b>		<b>ISL11P1BKSLSMWLZT</b>	
		<b>NOTES</b>	

\*Specific CCT selection only available in 100k increments, from 2200K to 4000K inclusively and not available with Dim-to-Warm feature.

## TESTED DIMMER COMPATIBILITY LIST - 120V

Compatible with ELV dimming (Trailing Edge / Reverse Phase).

We strongly recommend using dimmers that require a Neutral wire connection.

DIMMER BRAND	MODEL	MAX LEVEL	MIN LEVEL	DIMMING PROTOCOL
Lutron	DVELV-300P	95%	5%	Phase Cut
Lutron	DVELV-303P	95%	5%	Phase Cut
Lutron	CTELV-303P	93%	4%	Phase Cut
Lutron	SELV-300P	97%	3%	Phase Cut
Lutron	SELV-303P	97%	3%	Phase Cut
Lutron	MA-PRO / companion (MA-R-WH)	99%	2%	Phase Cut
Lutron	PD-5NE	100%	5%	Phase Cut
Lutron	PD-6WCL	100%	5%	Phase Cut
Lutron	DVRP-253P	94%	3%	Phase Cut
Lutron	CTRP-253P	90%	2%	Phase Cut
Lutron	NTELV-300	94%	2%	Phase Cut

---

Some dimmers require a minimum load, check specifications.

---






We recommend conducting your own test before final installation.

---

# Isle 12



An ode to quiet strength, Isle is a play both on illusion and perception allowing lightness to anchor and foundations to rise. Composed of a delicate glass tube resting on solid-stone and aluminum pedestals and suspended in mid-air like a surreal bridge, Isle is minimal, but never simplistic.

<b>TYPE</b>	Suspension
<b>CONSTRUCTION</b>	Frosted glass tube Polished aluminum or marble block Polished aluminum endcap, canopy and anchors Polyester cord
<b>SPECIFICATIONS</b>	Power consumption: 52W  Colour temperature: 3000K 2700K dim to warm 3000K to 2200K dim to warm 2700K to 2200K  Lumen output: 2700K - 2815 lm  Colour rendering index: ≥90 CRI Colour consistency: 3 SDCM Expected lifetime: ≥50 000h
<b>CONTROL</b>	120/277V on/off, 0-10V, or phase dimming 220-240V: On/Off, Phase Dimming, DALI Refer to our recommended list of dimmer models on page 6
<b>CORD LENGTH</b>	Mains/line cords- 120" / 304 cm Non-electrical cords- 96" / 244 cm
<b>WEIGHT</b>	ISL02B- 13.5lb / 6.1Kg ISL02A- 13.5lb / 6.1Kg ISL01B- 12lb / 5.4Kg
<b>CERTIFICATIONS</b>	     IP20
<b>WARRANTY</b>	2 years

## ISLE 12 - COLOUR PALETTE 1





ISL02B: Black Marquina + Polished Aluminum + Polished Aluminum

ISL02A: Polished Aluminum + Black Marquina


ISL01B: Black Marquina + Polished Aluminum

## NOTES


- The canopy can be offset from composition.
- Luminaire total height (ceiling to lowest point of luminaire).  
Min - 51.5" / 131 cm  
Max - 100" / 254 cm  
\*For any height outside these parameters, contact Lambert & Fils.
- Luminaire height is adjustable on site.
- Luminaire cannot be installed on a slanted ceiling.
- Ceiling anchors can be used as junction boxes for daisy chain. If needed, please inform your representative.
- Dimensions are approximate and may vary slightly.

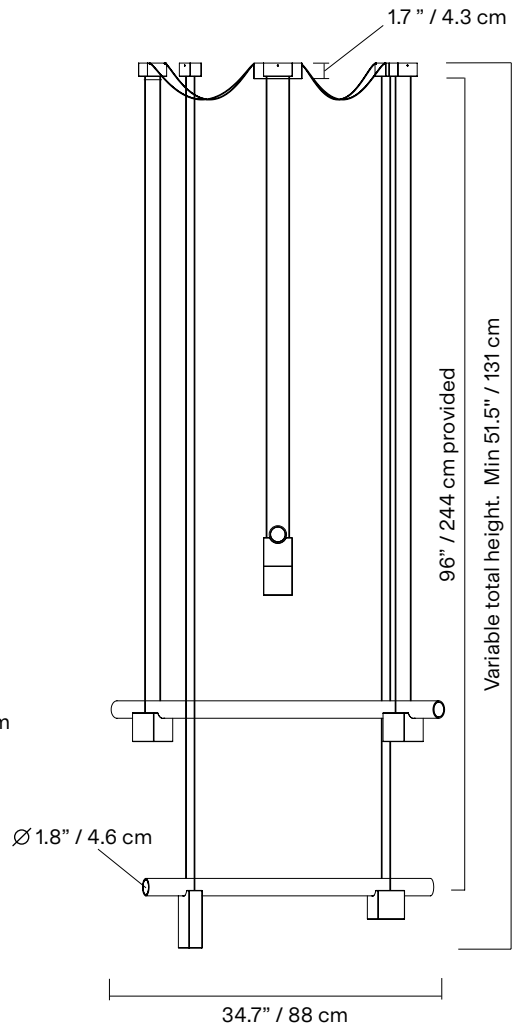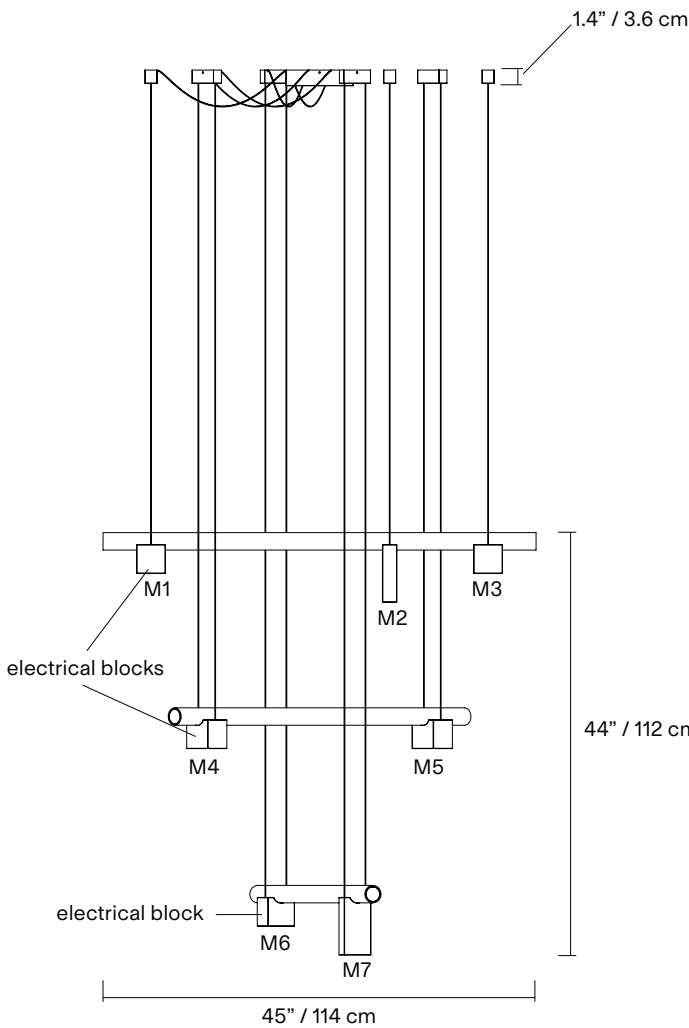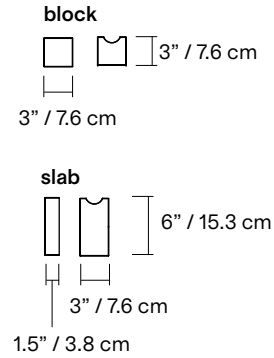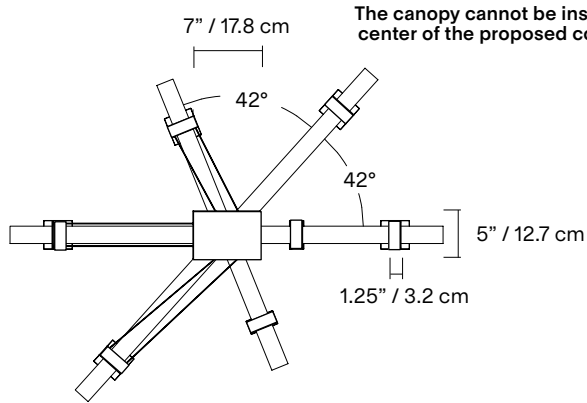

## SM- Surface mounted

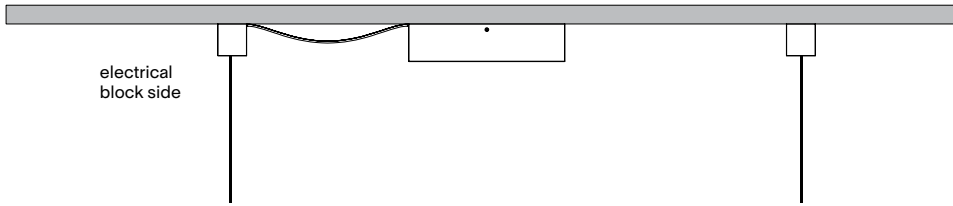

## RM-Remote driver

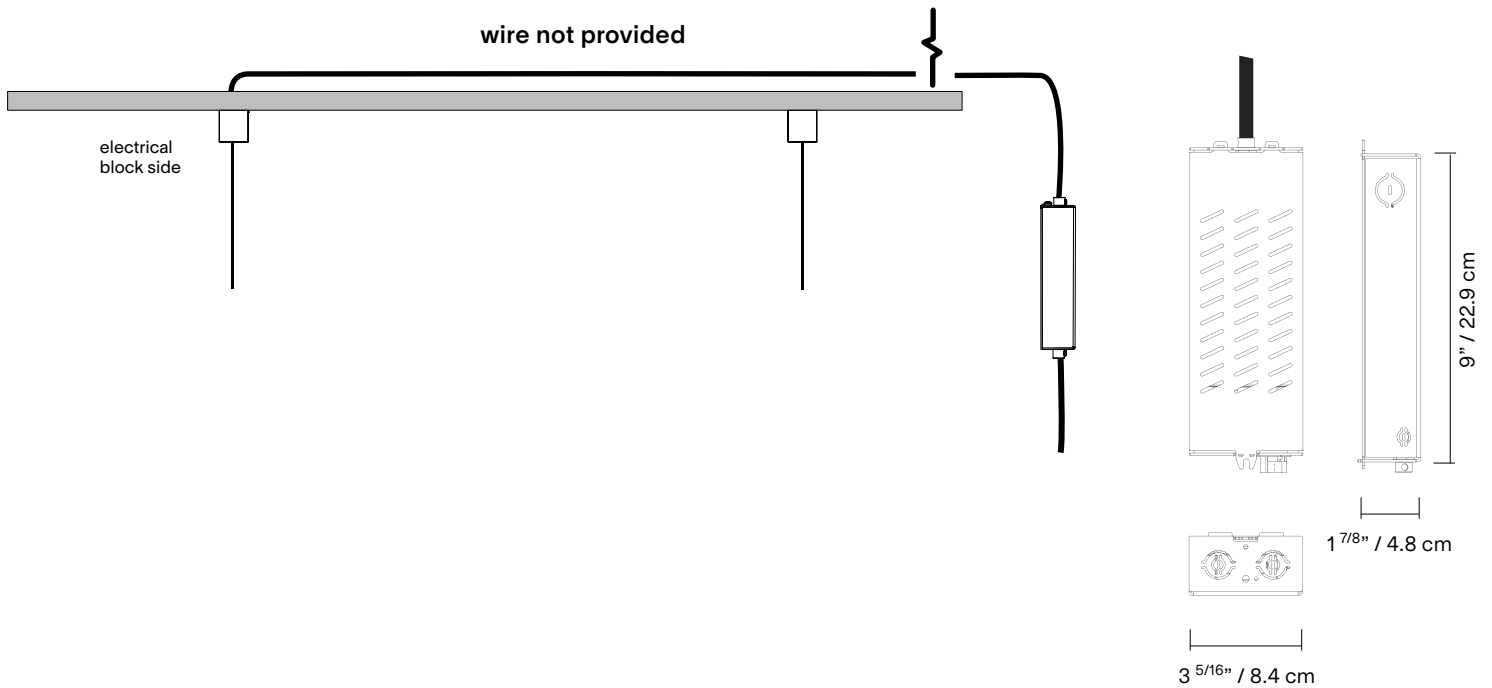

\*housing not necessary for Phase Dimming 220-240VAC (only driver provided)

## REMOTE DRIVER HOUSING

Must be accessible for maintenance in a well aerated location for heat dissipation

Use the following chart to determine proper wiring gauge according to the distance to its location.

### GAUGE

18AWG (0.75mm<sup>2</sup>)  
 16AWG (1.5mm<sup>2</sup>)  
 14AWG (2.5mm<sup>2</sup>)  
 12AWG (4mm<sup>2</sup>)

### MAX ALLOWABLE DISTANCE

85 ft. / (26 m)  
 136 ft. / (41 m)  
 216 ft. / (66 m)  
 343 ft. / (105 m)

## MATERIAL



**AL**  
Polished  
aluminum



**BM**  
Black  
marquina  
marble



**GU**  
Guatemala  
green  
marble



**PI**  
Pink  
portugal  
marble



**RL**  
Red  
levanto  
marble



**RN**  
Red  
negrais  
marble


## CORD



**BK**  
Black

## MOUNTING

**SM**  
Surface mounted




**RM**  
Remote Driver



## NOTES

- Must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- Not protected against liquids (refer to IP20)
- Additional charges for modifications or for special orders
- Please refer to maintenance sheet on our website for cleaning instructions

## LAMP ANATOMY

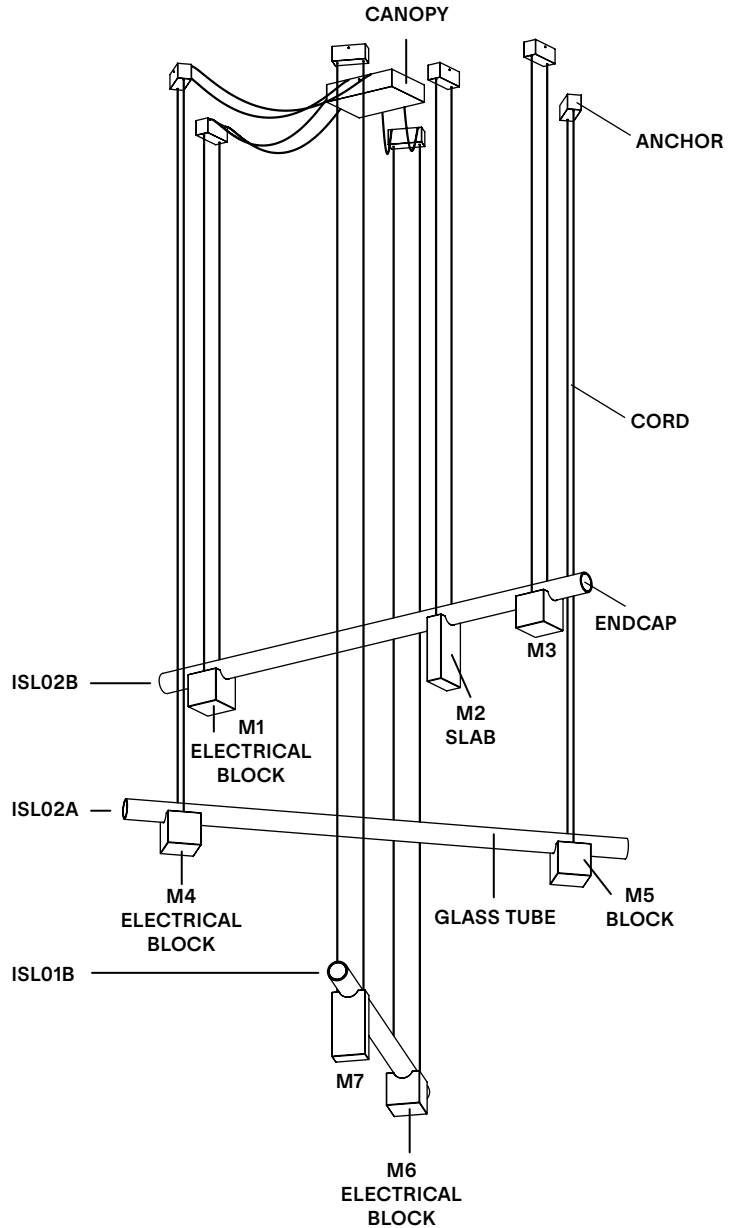

		Example	Fill with your selection
<b>COLLECTION</b>	<b>ISL</b> Isle	<b>ISL</b>	<b>ISL</b>
<b>MODEL</b>	<b>12</b>	<b>12</b>	<b>12</b>
<b>MATERIAL</b>	<b>P1</b> ISL02B - Black Marquina (M1) + Polished Aluminum (M2+M3) ISL02A - Polished Aluminum (M4) + Black Marquina (M5) ISL01B - Black Marquina (M6) + Polished Aluminum (M7) <b>P2</b> ISL02B - Polished Aluminum (M1) + Black Marquina (M2) + Guatemala Green (M3) ISL02A - Guatemala Green (M4) + Polished Aluminum (M5) ISL01B - Black Marquina (M6) + Polished Aluminum (M7) <b>P3</b> ISL02B - Red Negrais (M1) + Pink Portugal (M2) + Red Levanto (M3) ISL02A - Red Levanto (M4) + Red Negrais (M5) ISL01B - Pink Portugal (M6) + Red Levanto (M7) <b>P4</b> ISL02B - Polished Aluminum (M1) + Red Levanto (M2) + Pink Portugal (M3) ISL02A - Pink Portugal (M4) + Polished Aluminum (M5) ISL01B - Red Levanto (M6) + Polished Aluminum (M7)	<b>P1</b>	
<b>CORD</b>	<b>BK</b> Black	<b>BK</b>	<b>BK</b>
<b>CANOPY AND ANCHORS</b>	<b>AL</b> Polished aluminum	<b>AL</b>	<b>AL</b>
<b>MOUNTING</b>	<b>SM</b> Surface mounted <b>RM</b> Remote driver	<b>SM</b>	
<b>COLOUR TEMPERATURE (CCT)</b>	<b>WL</b> Warm light (2700K) <b>NL</b> Neutral light (3000K) <b>D27</b> Dim to warm (2700K-2200K) <b>D30</b> Dim to warm (3000K-2200K) <b>CCT</b> Other CCT available upon request*	<b>WL</b>	
<b>DIMMING</b>	<b>ZT</b> 0-10V (120VAC only) <b>PH</b> Phase dimming <b>DA</b> DALI (220-240VAC only)	<b>ZT</b>	
<b>FULL SKU</b>		<b>ISL12P1BKALSMWLZT</b>	

**NOTES**

\*Specific CCT selection only available in 100k increments, from 2200K to 4000K inclusively and not available with Dim-to-Warm feature.



## TESTED DIMMER COMPATIBILITY LIST - 120V

Compatible with ELV dimming (Trailing Edge / Reverse Phase).

We strongly recommend using dimmers that require a Neutral wire connection.

DIMMER BRAND	MODEL	MAX LEVEL	MIN LEVEL	DIMMING PROTOCOL
Lutron	DVELV-300P	95%	5%	Phase Cut
Lutron	DVELV-303P	95%	5%	Phase Cut
Lutron	CTELV-303P	93%	4%	Phase Cut
Lutron	SELV-300P	97%	3%	Phase Cut
Lutron	SELV-303P	97%	3%	Phase Cut
Lutron	MA-PRO / companion (MA-R-WH)	99%	2%	Phase Cut
Lutron	PD-5NE	100%	5%	Phase Cut
Lutron	PD-6WCL	100%	5%	Phase Cut
Lutron	DVRP-253P	94%	3%	Phase Cut
Lutron	CTRP-253P	90%	2%	Phase Cut
Lutron	NTELV-300	94%	2%	Phase Cut

---

Some dimmers require a minimum load, check specifications.

---

We recommend conducting your own test before final installation.

---

# Isle 13








## ISLE 13 - COLOUR PALETTE 1

ISL03A: Black Marquina + Polished Aluminum + Black Marquina

ISL02A: Polished Aluminum + Black Marquina

ISL01A: Black Marquina + Polished Aluminum




An ode to quiet strength, Isle is a play both on illusion and perception allowing lightness to anchor and foundations to rise. Composed of a delicate glass tube resting on solid-stone and aluminum pedestals and suspended in mid-air like a surreal bridge, Isle is minimal, but never simplistic.

<b>TYPE</b>	Suspension
<b>CONSTRUCTION</b>	Frosted glass tube Polished aluminum or marble block Polished aluminum endcap, canopy and anchors Polyester cord
<b>SPECIFICATIONS</b>	Power consumption: 52W  Colour temperature: 3000K 2700K dim to warm 3000K to 2200K dim to warm 2700K to 2200K  Lumen output: 2700K - 2815 lm  Colour rendering index: ≥90 CRI Colour consistency: 3 SDCM Expected lifetime: ≥50 000h
<b>CONTROL</b>	120/277V on/off, 0-10V, or phase dimming 220-240V: On/Off, Phase Dimming, DALI Refer to our recommended list of dimmer models on page 6
<b>CORD LENGTH</b>	Mains/line cords- 120" / 304 cm Non-electrical cords- 96" / 244 cm
<b>WEIGHT</b>	ISL03A- 17.5lb / 7.9Kg ISL02A- 13.5lb / 6.1Kg ISL01A- 12lb / 5.4Kg
<b>CERTIFICATIONS</b>	     IP20
<b>WARRANTY</b>	2 years


## NOTES

- The canopy can be offset from composition.
- Luminaire total height (ceiling to lowest point of luminaire)  
Min - 51,5"/131 cm  
Max - 100"/254 cm  
\*For any height outside these parameters, contact Lambert & Fils
- For installation on slanted ceiling, contact Lambert & Fils
- Ceiling anchors can be used as junction boxes for daisy chain. If needed, please inform your representative.
- Dimensions are approximate and may vary slightly

The canopy cannot be installed in the center of the proposed composition.

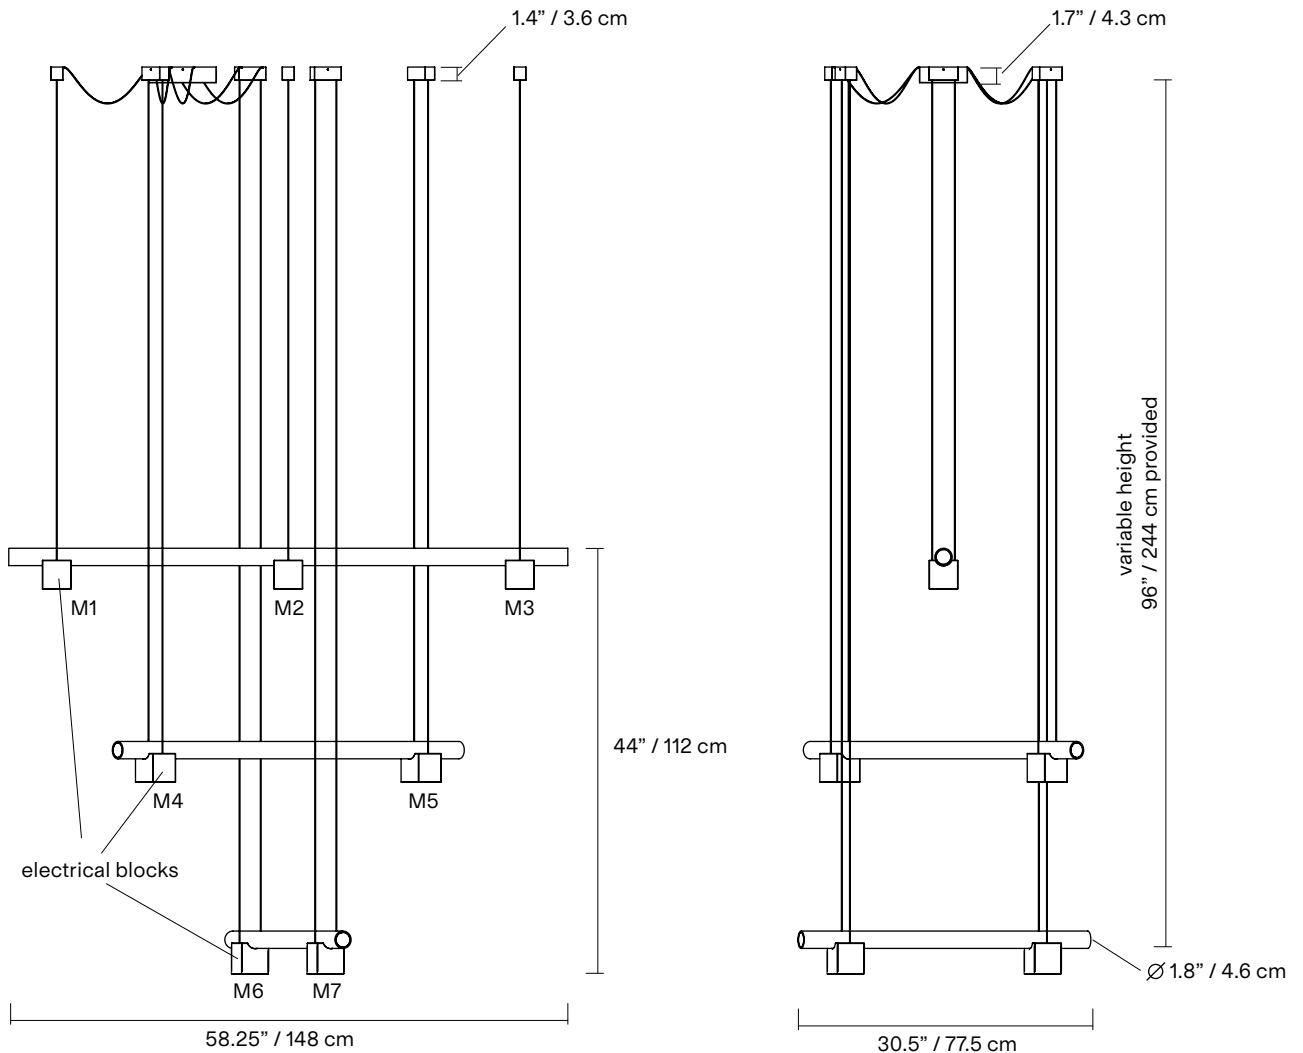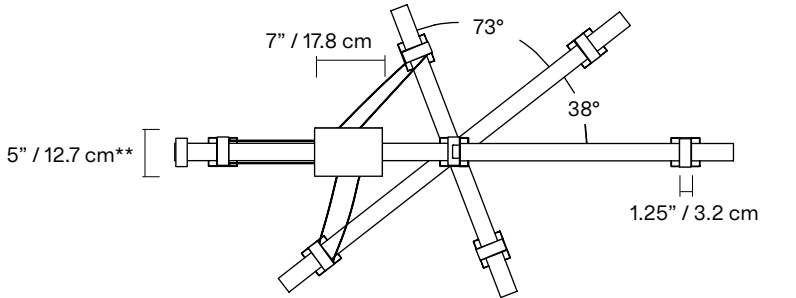


## SM- Surface mounted

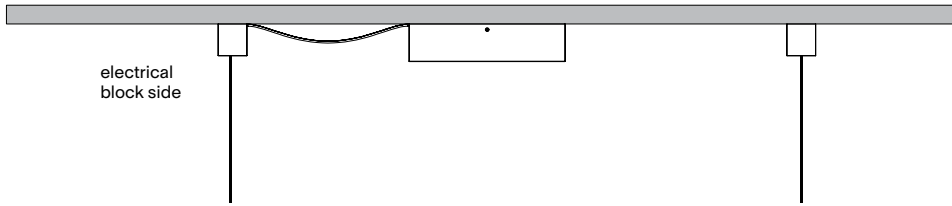

electrical  
block side

## RM-Remote driver

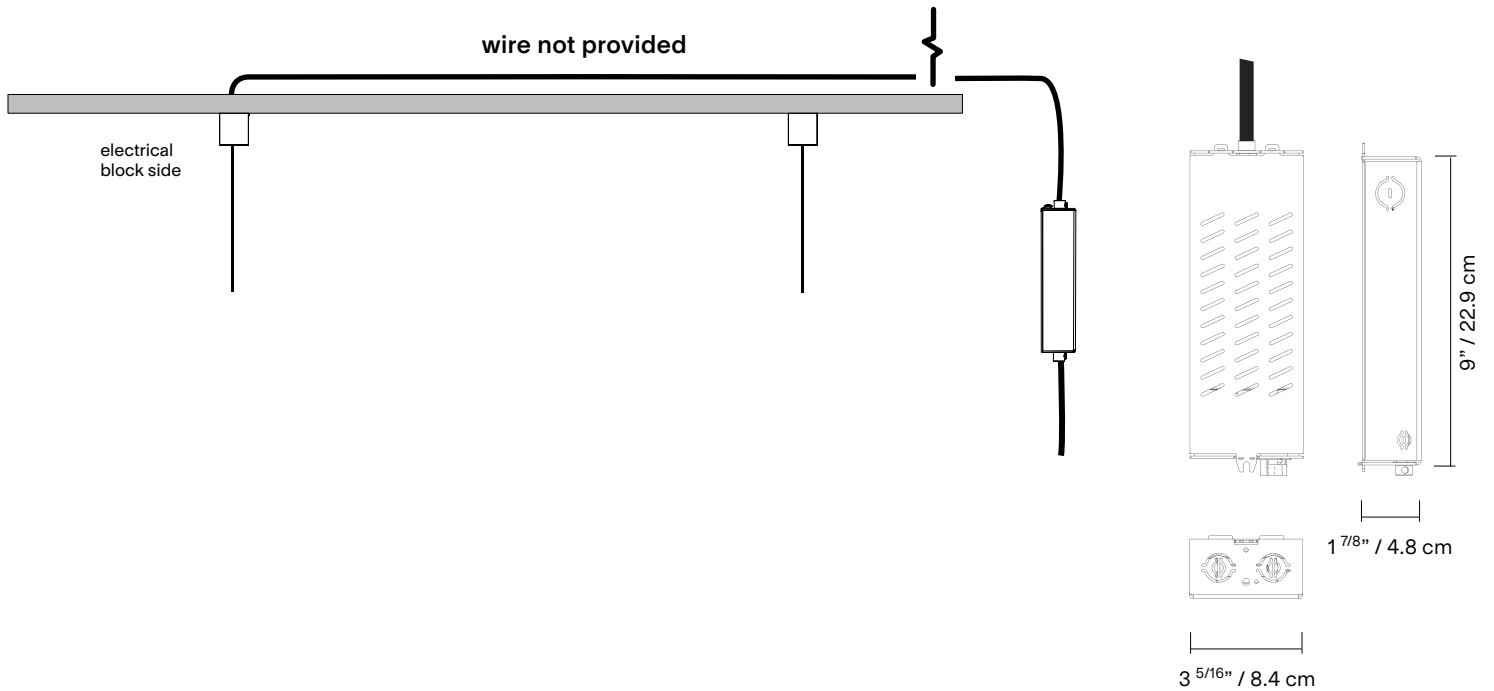

wire not provided

electrical  
block side

9" / 22.9 cm

1 7/8" / 4.8 cm

3 5/16" / 8.4 cm

\*housing not necessary for  
Phase Dimming 220-240VAC  
(only driver provided)

## REMOTE DRIVER HOUSING

Must be accessible for maintenance in a well aerated location for heat dissipation

Use the following chart to determine proper wiring gauge according to the distance to its location.


### GAUGE

18AWG (0.75mm<sup>2</sup>)  
16AWG (1.5mm<sup>2</sup>)  
14AWG (2.5mm<sup>2</sup>)  
12AWG (4mm<sup>2</sup>)

### MAX ALLOWABLE DISTANCE

85 ft. / (26 m)  
136 ft. / (41 m)  
216 ft. / (66 m)  
343 ft. / (105 m)

## MATERIAL

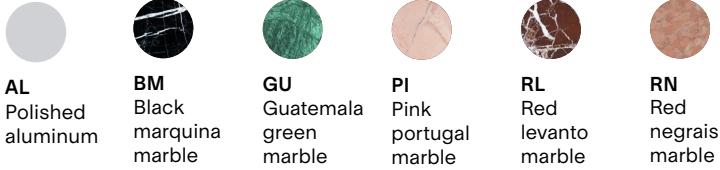


## CORD




## MOUNTING

**SM**  
Surface mounted




**RM**  
Remote Driver



## NOTES

- Must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- Not protected against liquids (refer to IP20)
- Additional charges for modifications or for special orders
- Please refer to maintenance sheet on our website for cleaning instructions

## LAMP ANATOMY

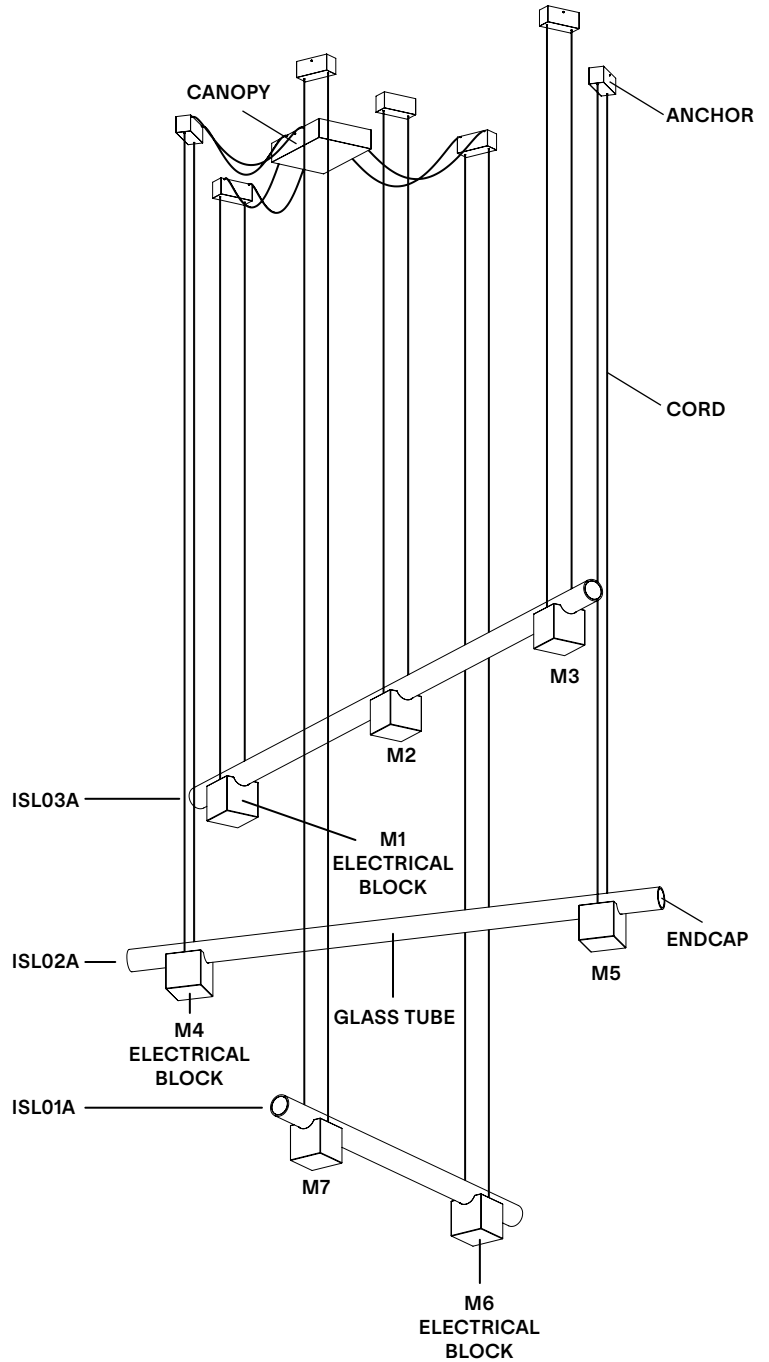

		Example	Fill with your selection
<b>COLLECTION</b>	<b>ISL</b> Isle	<b>ISL</b>	<b>ISL</b>
<b>MODEL</b>	<b>13</b>	<b>13</b>	<b>13</b>
<b>MATERIAL</b>	<p><b>P1</b> ISL03A - Black Marquina (M1) + Polished Aluminum (M2) + Black Marquina (M3) ISL02A - Polished Aluminum (M4) + Black Marquina (M5) ISL01A - Black Marquina (M6) + Polished Aluminum (M7)</p> <p><b>P2</b> ISL03A - Black Marquina (M1) + Polished Aluminum (M2) + Guatemala Green (M3) ISL02A - Polished Aluminum (M4) + Black Marquina (M5) ISL01A - Guatemala Green (M6) + Polished Aluminum (M7)</p> <p><b>P3</b> ISL03A - Red Negrais (M1) + Polished Aluminum (M2) + Pink Portugal (M3) ISL02A - Polished Aluminum (M4) + Red Negrais (M5) ISL01A - Pink Portugal (M6) + Polished Aluminum (M7)</p> <p><b>P4</b> ISL03A - Polished Aluminum (M1) + Pink Portugal (M2) + Red Levanto (M3) ISL02A - Red Levanto (M4) + Polished Aluminum (M5) ISL01A - Polished Aluminum (M6) + Pink Portugal (M7)</p>	<b>P1</b>	
<b>CORD</b>	<b>BK</b> Black	<b>BK</b>	<b>BK</b>
<b>CANOPY AND ANCHORS</b>	<b>AL</b> Polished aluminum	<b>AL</b>	<b>AL</b>
<b>MOUNTING</b>	<b>SM</b> Surface mounted <b>RM</b> Remote driver	<b>SM</b>	
<b>COLOUR TEMPERATURE (CCT)</b>	<b>WL</b> Warm light (2700K) <b>NL</b> Neutral light (3000K) <b>D27</b> Dim to warm (2700K-2200K) <b>D30</b> Dim to warm (3000K-2200K) <b>CCT</b> Other CCT available upon request*	<b>WL</b>	
<b>DIMMING</b>	<b>ZT</b> 0-10V (120VAC only) <b>PH</b> Phase dimming <b>DA</b> DALI (220-240VAC only)	<b>ZT</b>	
<b>FULL SKU</b>		<b>ISL13P1BKALSMWLZT</b>	

**NOTES**

\*Specific CCT selection only available in 100k increments, from 2200K to 4000K inclusively and not available with Dim-to-Warm feature.

## TESTED DIMMER COMPATIBILITY LIST - 120V

Compatible with Trailing Edge dimming (Reverse Phase/ELV) or Leading Edge (Forward Phase) dimming.  
We strongly recommend using dimmers that require a Neutral wire connection.

DIMMER BRAND	MODEL	MAX LEVEL	MIN LEVEL	DIMMING PROTOCOL
Lutron Diva	DVELV-300P	100%	1%	Phase Cut
Lutron Diva	DVELV-303P	100%	1%	Phase Cut
Lutron Diva	DVRP-253P	100%	1%	Phase Cut
Lutron Skylark	CTELV-303P	100%	1%	Phase Cut
Lutron Skylark	SELV-300P	100%	1%	Phase Cut
Lutron Skylark	SELV-303P	100%	1%	Phase Cut
Lutron Skylark	CTRP-253P	100%	1%	Phase Cut
Lutron Maestro	MA-PRO	100%	1%	Phase Cut
Lutron Caseta	PD-5NE	100%	1%	Phase Cut
Lutron Nova	NTELV-300	100%	1%	Phase Cut

---

Some dimmers require a minimum load, check specifications.

---

We recommend conducting your own test before final installation.

---

# Isle 15








## ISLE 15 - COLOUR PALETTE 1

ISL01B: Guatemala Green + Polished Aluminum

ISL03B: Black Marquina + Polished Aluminum + Guatemala Green + Polished Aluminum



An ode to quiet strength, Isle is a play both on illusion and perception allowing lightness to anchor and foundations to rise. Composed of a delicate glass tube resting on solid-stone and aluminum pedestals and suspended in mid-air like a surreal bridge, Isle is minimal, but never simplistic.

<b>TYPE</b>	Suspension
<b>CONSTRUCTION</b>	Frosted glass tube Polished aluminum or marble block Polished aluminum endcap, canopy and anchors Polyester cord
<b>SPECIFICATIONS</b>	Power consumption: 52W  Colour temperature: 3000K 2700K dim to warm 3000K to 2200K dim to warm 2700K to 2200K  Lumen output: 2700K - 2815 lm  Colour rendering index: ≥90 CRI Colour consistency: 3 SDCM Expected lifetime: ≥50 000h
<b>CONTROL</b>	120/277V on/off, 0-10V, or phase dimming 220-240V: On/Off, Phase Dimming, DALI Refer to our recommended list of dimmer models on page 6
<b>CORD LENGTH</b>	Mains/line cord- 120" / 304 cm Non-electrical cord- 96" / 244 cm
<b>WEIGHT</b>	ISL01B- 12lb / 5.4Kg ISL03B- 20.5lb / 9.3Kg
<b>CERTIFICATIONS</b>	     IP20
<b>WARRANTY</b>	2 years




## NOTES


- The canopy can be offset from composition.
- Luminaire total height (ceiling to lowest point of luminaire).  
Min - 12"/ 31 cm  
Max - 100"/ 254 cm  
\*For any height outside these parameters, contact Lambert & Fils.
- Luminaire height is adjustable on site.
- For installation on slanted ceilings contact Lambert & Fils..
- Ceiling anchors can be used as junction boxes for daisy chain. If needed, please inform your representative.
- Dimensions are approximate and may vary slightly.

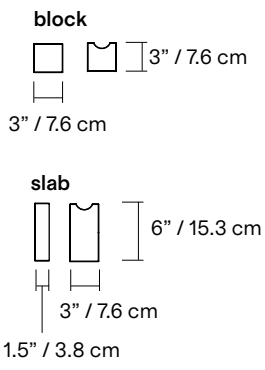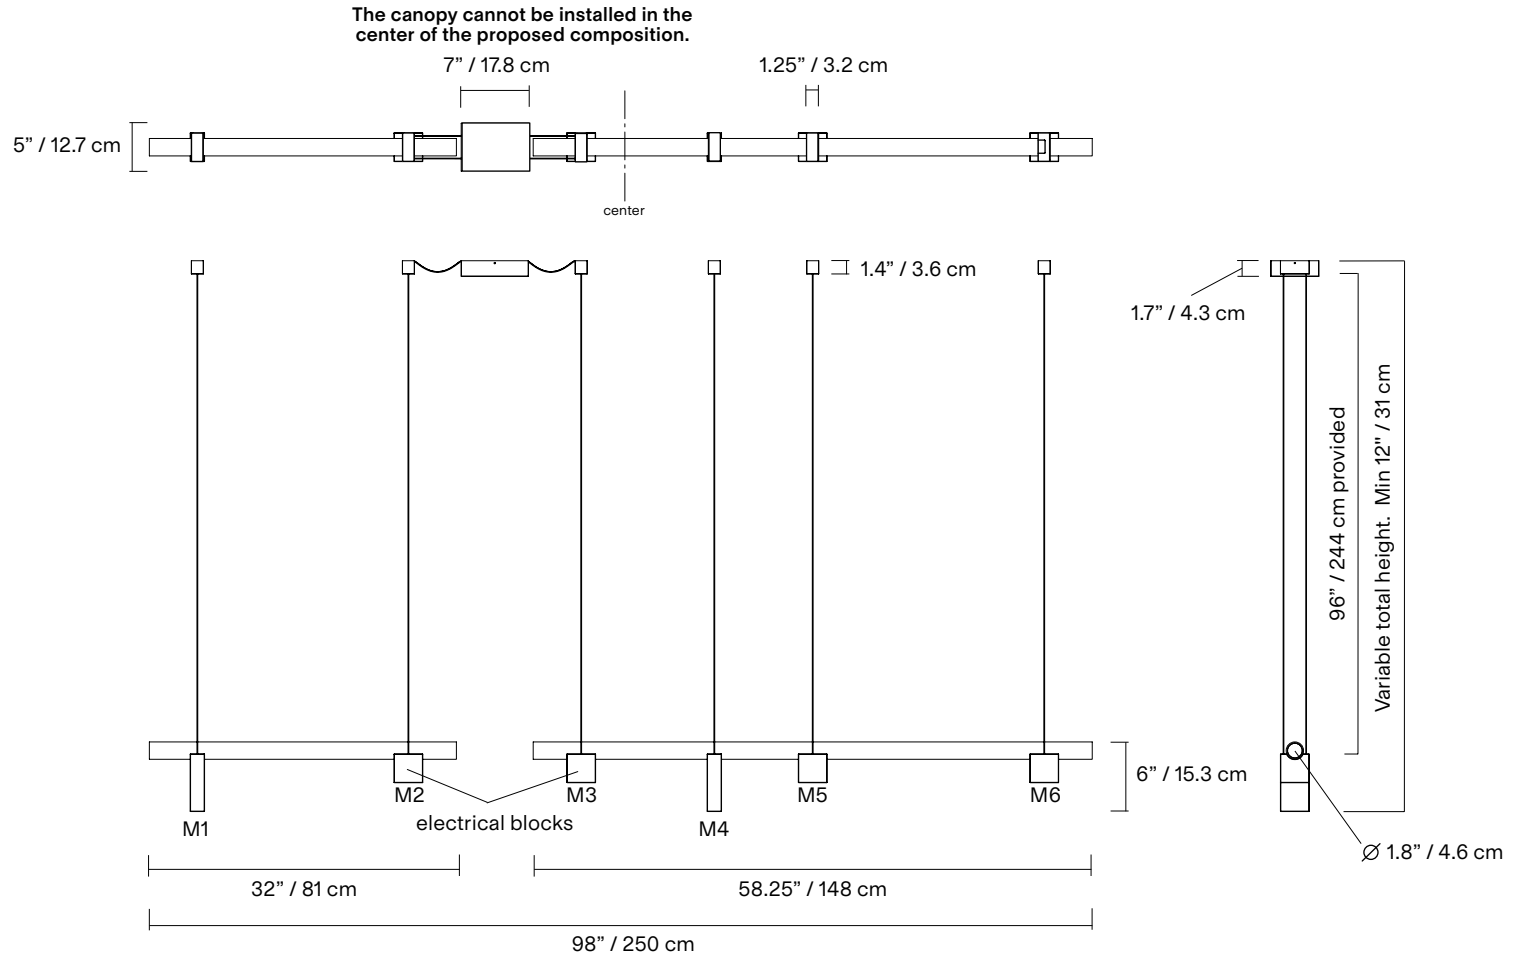

## SM- Surface mounted

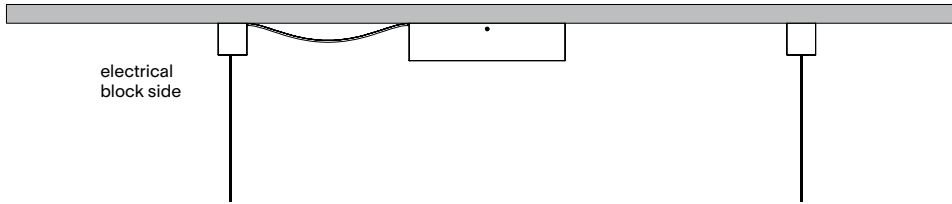

## RM-Remote driver

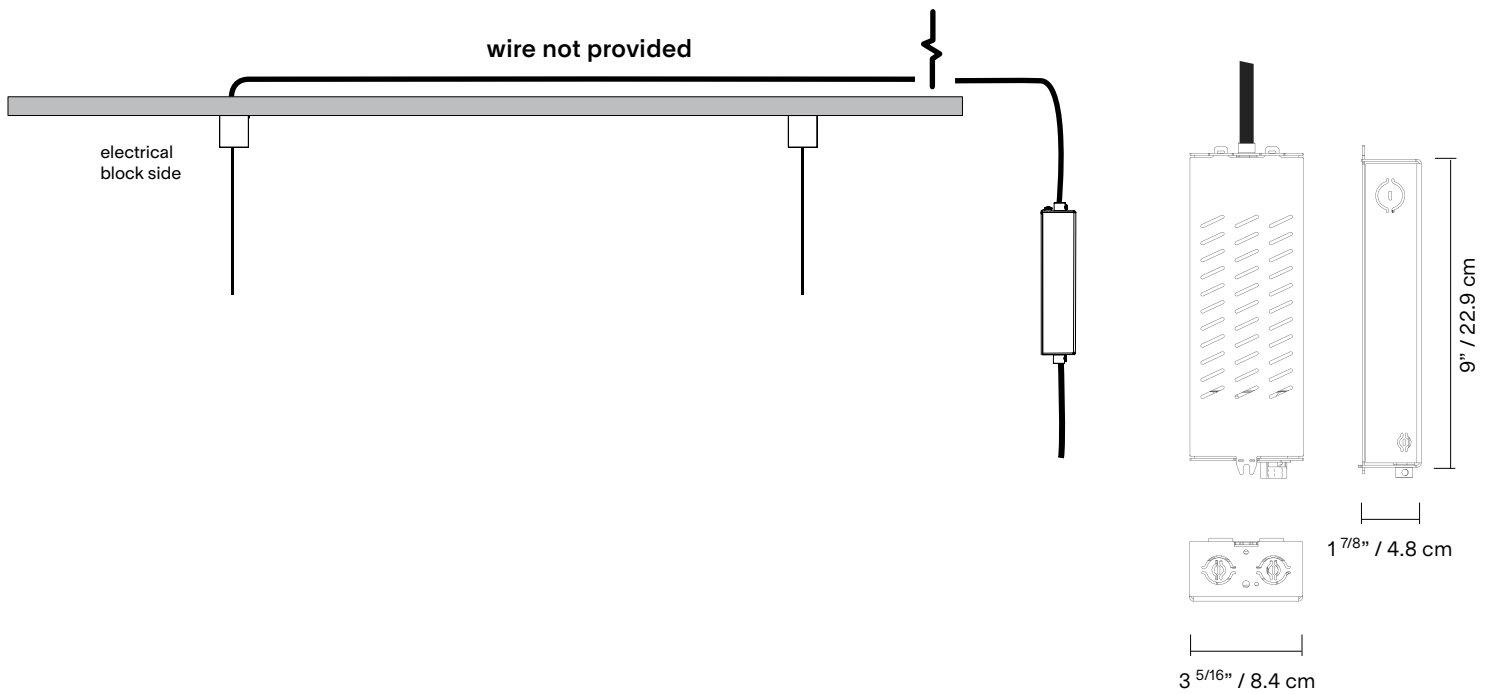

\*housing not necessary for Phase Dimming 220-240VAC (only driver provided)

## REMOTE DRIVER HOUSING

Must be accessible for maintenance in a well aerated location for heat dissipation

Use the following chart to determine proper wiring gauge according to the distance to its location.

### GAUGE

18AWG (0.75mm<sup>2</sup>)  
 16AWG (1.5mm<sup>2</sup>)  
 14AWG (2.5mm<sup>2</sup>)  
 12AWG (4mm<sup>2</sup>)

### MAX ALLOWABLE DISTANCE

85 ft. / (26 m)  
 136 ft. / (41 m)  
 216 ft. / (66 m)  
 343 ft. / (105 m)

## MATERIAL



**AL**  
Polished  
aluminum



**BM**  
Black  
marquina  
marble



**GU**  
Guatemala  
green  
marble



**PI**  
Pink  
portugal  
marble



**RL**  
Red  
levanto  
marble



**RN**  
Red  
negrais  
marble


## CORD




**BK**  
Black

## MOUNTING

**SM**  
Surface mounted




**RM**  
Remote Driver



## NOTES

- Must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- Not protected against liquids (refer to IP20)
- Additional charges for modifications or for special orders
- Please refer to maintenance sheet on our website for cleaning instructions

## LAMP ANATOMY

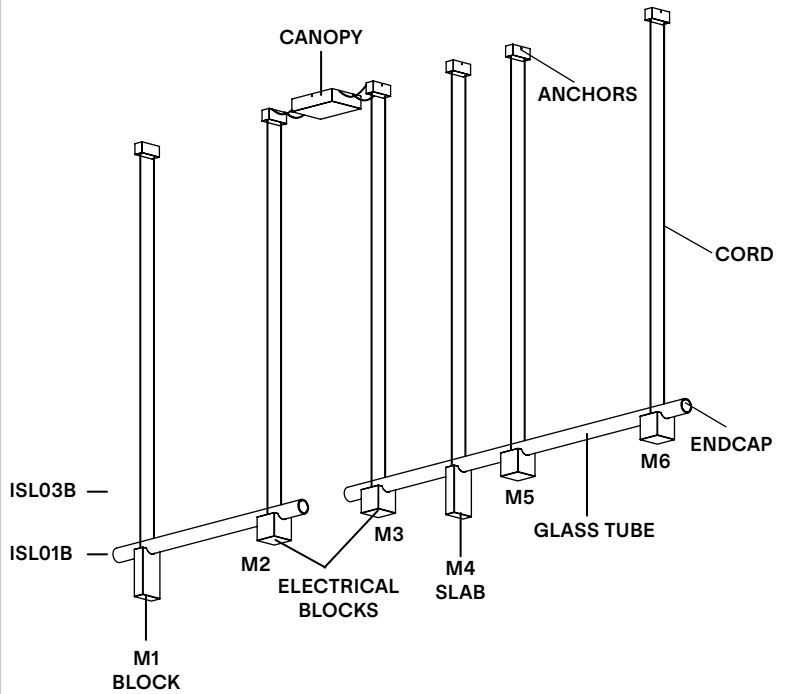

		Example	Fill with your selection
<b>COLLECTION</b>	<b>ISL</b> Isle	<b>ISL</b>	<b>ISL</b>
<b>MODEL</b>	<b>15</b>	<b>15</b>	<b>15</b>
<b>MATERIAL</b> (Electrical block always polished aluminum)	<b>P1</b> ISL01B - Guatemala Green (M1) + Polished Aluminum (M2) ISL03B - Black Marquina (M3) + Polished Aluminum (M4) + Guatemala Green (M5) + Polished Aluminum (M6) <b>P2</b> ISL01B - Polished Aluminum (M1) + Guatemala Green (M2) ISL03B - Black Marquina (M3) + Polished Aluminum (M4) + Red Negrais (M5) + Guatemala Green (M6) <b>P3</b> ISL01B - Red Levanto (M1) + Red Negrais (M2) ISL03B - Pink Portugal (M3) + Red Levanto (M4) + Pink Portugal (M5) + Red Negrais (M6) <b>P4</b> ISL01B - Polished Aluminum (M1) + Pink Portugal (M2) ISL03B - Red Levanto (M3) + Polished Aluminum (M4) + Red Levanto (M5) + Pink Portugal (M6) <b>AL</b> All models Polished Aluminum ISL01B - Polished Aluminum (M1, M2) ISL03B - Polished Aluminum (M3, M4,M5)	<b>P1</b>	
<b>CORD</b>	<b>BK</b> Black	<b>BK</b>	<b>BK</b>
<b>CANOPY AND ANCHORS</b>	<b>AL</b> Polished aluminum	<b>AL</b>	<b>AL</b>
<b>MOUNTING</b>	<b>SM</b> Surface mounted <b>RM</b> Remote driver	<b>SM</b>	
<b>COLOUR TEMPERATURE (CCT)</b>	<b>WL</b> Warm light (2700K) <b>NL</b> Neutral light (3000K) <b>D27</b> Dim to warm (2700K-2200K) <b>D30</b> Dim to warm (3000K-2200K) <b>CCT</b> Other CCT available upon request*	<b>WL</b>	
<b>DIMMING</b>	<b>ZT</b> 0-10V (120VAC only) <b>PH</b> Phase dimming <b>DA</b> DALI (220-240VAC only)	<b>ZT</b>	
<b>FULL SKU</b>		<b>ISL15P1BKALSMWLZT</b>	

**NOTES**

\*Specific CCT selection only available in 100k increments, from 2200K to 4000K inclusively and not available with Dim-to-Warm feature.

## TESTED DIMMER COMPATIBILITY LIST - 120V

Compatible with ELV dimming (Trailing Edge / Reverse Phase).

We strongly recommend using dimmers that require a Neutral wire connection.

DIMMER BRAND	MODEL	MAX LEVEL	MIN LEVEL	DIMMING PROTOCOL
Lutron	DVELV-300P	95%	5%	Phase Cut
Lutron	DVELV-303P	95%	5%	Phase Cut
Lutron	CTELV-303P	93%	4%	Phase Cut
Lutron	SELV-300P	97%	3%	Phase Cut
Lutron	SELV-303P	97%	3%	Phase Cut
Lutron	MA-PRO / companion (MA-R-WH)	99%	2%	Phase Cut
Lutron	PD-5NE	100%	5%	Phase Cut
Lutron	PD-6WCL	100%	5%	Phase Cut
Lutron	DVRP-253P	94%	3%	Phase Cut
Lutron	CTRP-253P	90%	2%	Phase Cut
Lutron	NTELV-300	94%	2%	Phase Cut

---

Some dimmers require a minimum load, check specifications.

---

We recommend conducting your own test before final installation.

---

# Isle 16








## ISLE 16 - COLOUR PALETTE 1

ISL03A: Polished Aluminum + Polished Aluminum + Black Marquina

ISL02A: Polished Aluminum + Black Marquina



ISL01A: Polished Aluminum + Black Marquina

An ode to quiet strength, Isle is a play both on illusion and perception allowing lightness to anchor and foundations to rise. Composed of a delicate glass tube resting on solid-stone and aluminum pedestals and suspended in mid-air like a surreal bridge, Isle is minimal, but never simplistic.


<b>TYPE</b>	Suspension
<b>CONSTRUCTION</b>	Frosted glass tube Polished aluminum or marble block Polished aluminum endcap, canopy and anchors Polyester cord
<b>SPECIFICATIONS</b>	Power consumption: 52W  Colour temperature: 3000K 2700K dim to warm 3000K to 2200K dim to warm 2700K to 2200K  Lumen output: 2700K - 2815 lm  Colour rendering index: ≥90 CRI Colour consistency: 3 SDCM Expected lifetime: ≥50 000h
<b>CONTROL</b>	120/277V on/off, 0-10V, or phase dimming 220-240V: On/Off, Phase Dimming, DALI Refer to our recommended list of dimmer models on page 6
<b>CORD LENGTH</b>	Mains/line cords- 120" / 304 cm Non-electrical cords- 96" / 244 cm
<b>WEIGHT</b>	ISL03A- 17.5lb / 7.9Kg ISL02A- 13.5lb / 6.1Kg ISL01A- 12lb / 5.4Kg
<b>CERTIFICATIONS</b>	     IP20
<b>WARRANTY</b>	2 years

## NOTES


- The canopy can be offset from composition.
- Luminaire total height (ceiling to lowest point of luminaire).  
Min - 36" / 92 cm  
Max - 100" / 254 cm  
\*For any height outside these parameters, contact Lambert & Fils.
- Luminaire height is adjustable on site.
- For installation on slanted ceilings, contact Lambert & Fils.
- Ceiling anchors can be used as junction boxes for daisy chain. If needed, please inform your representative.
- Dimensions are approximate and may vary slightly.

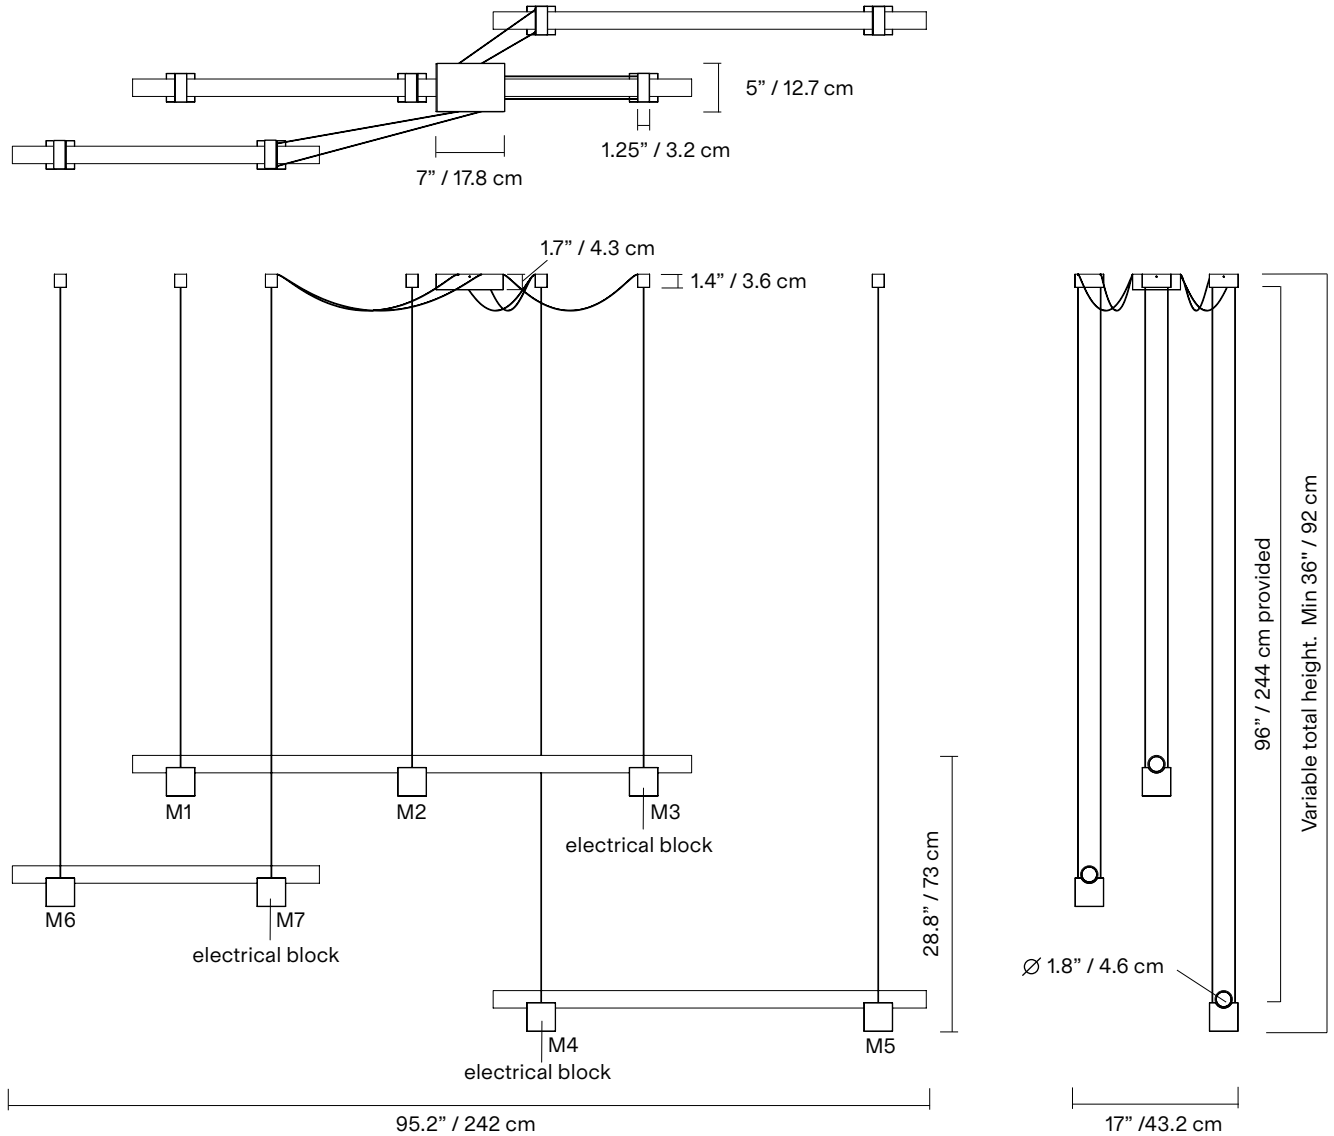

## SM- Surface mounted

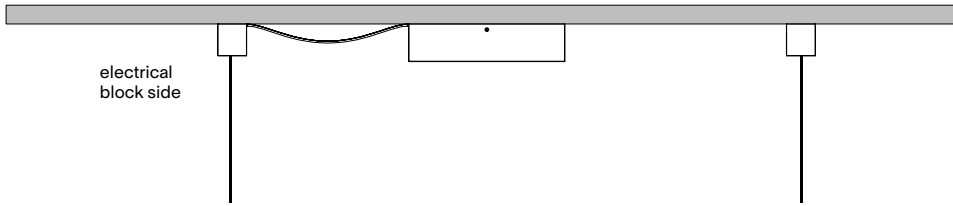

## RM-Remote driver

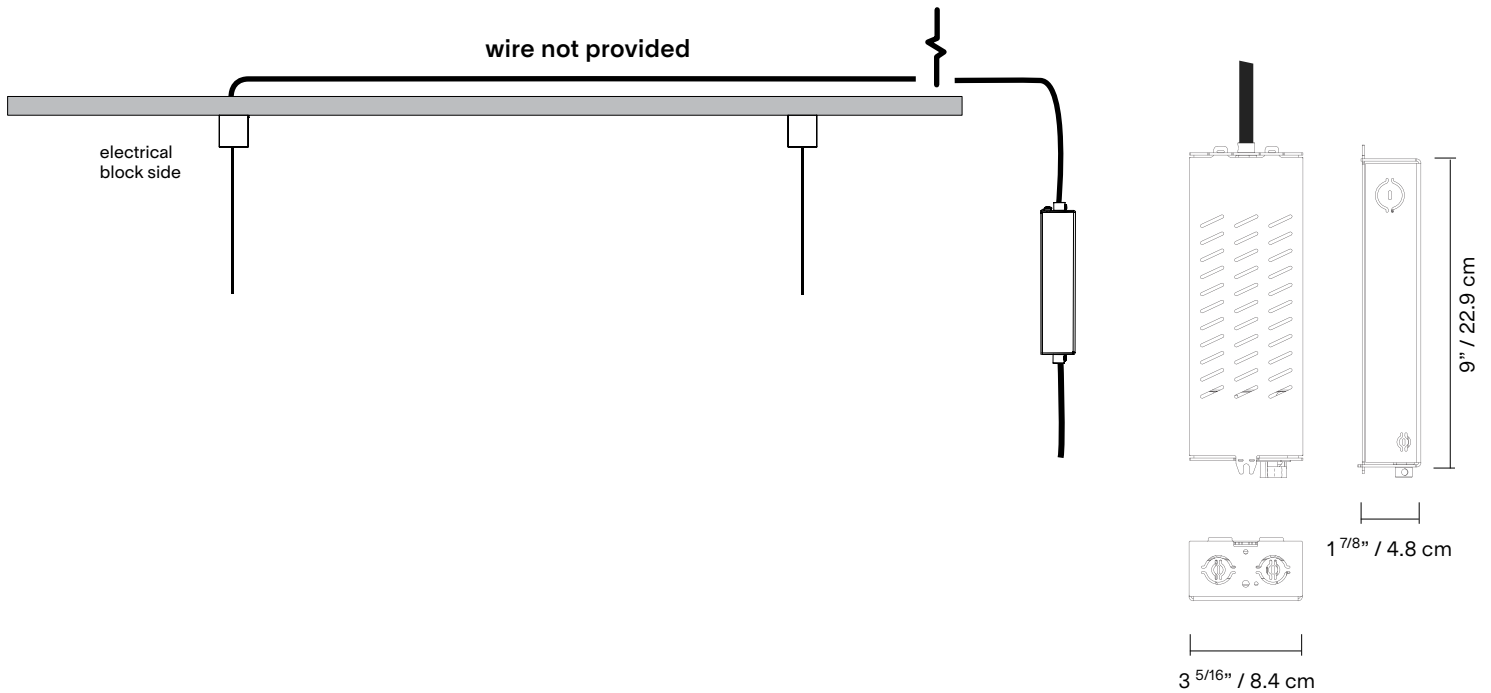

\*housing not necessary for Phase Dimming 220-240VAC (only driver provided)

## REMOTE DRIVER HOUSING

Must be accessible for maintenance in a well aerated location for heat dissipation

Use the following chart to determine proper wiring gauge according to the distance to its location.

### GAUGE

18AWG (0.75mm<sup>2</sup>)  
 16AWG (1.5mm<sup>2</sup>)  
 14AWG (2.5mm<sup>2</sup>)  
 12AWG (4mm<sup>2</sup>)

### MAX ALLOWABLE DISTANCE

85 ft. / (26 m)  
 136 ft. / (41 m)  
 216 ft. / (66 m)  
 343 ft. / (105 m)



## MATERIAL



**AL**  
Polished  
aluminum



**BM**  
Black  
marquina  
marble



**GU**  
Guatemala  
green  
marble



**PI**  
Pink  
portugal  
marble



**RL**  
Red  
levanto  
marble



**RN**  
Red  
negrais  
marble


## CORD




**BK**  
Black

## MOUNTING

**SM**  
Surface mounted




**RM**  
Remote Driver



## NOTES

- Must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- Not protected against liquids (refer to IP20)
- Additional charges for modifications or for special orders
- Please refer to maintenance sheet on our website for cleaning instructions

## LAMP ANATOMY

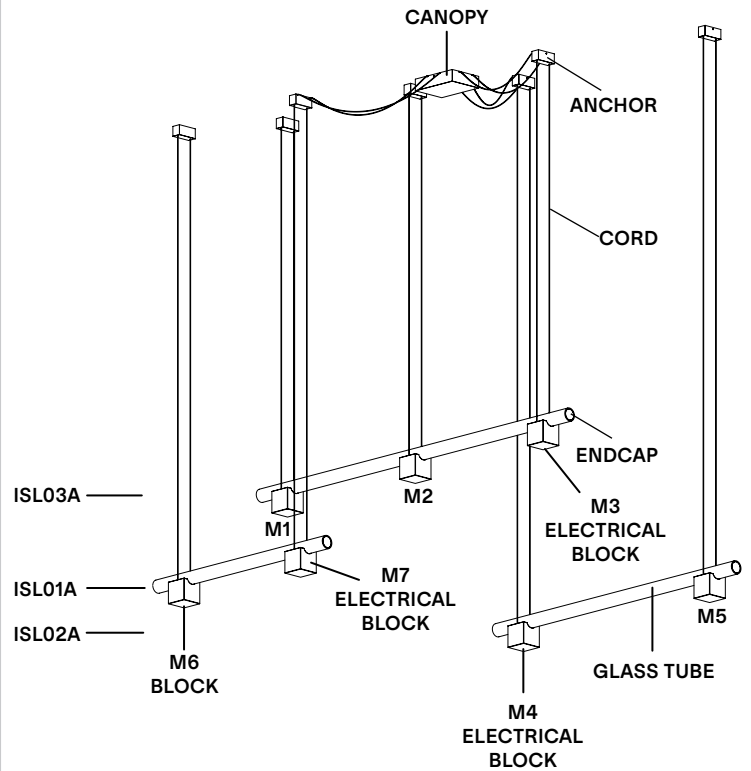

		Example	Fill with your selection
<b>COLLECTION</b>	<b>ISL</b> Isle	<b>ISL</b>	<b>ISL</b>
<b>MODEL</b>	<b>16</b>	<b>16</b>	<b>16</b>
<b>MATERIAL</b>	<b>P1</b> ISL03A- Polished Aluminum (M1) + Polished Aluminum (M2) + Black Marquina (M3) ISL02A- Polished Aluminum (M4) + Black Marquina (M5) ISL01A- Polished Aluminum (M6) + Black Marquina (M7) <b>P2</b> ISL03A- Polished Aluminum (M1) + Black Marquina (M2) + Guatemala Green (M3) ISL02A- Polished Aluminum (M4) + Black Marquina (M5) ISL01A- Polished Aluminum (M6) + Guatemala Green (M7) <b>P3</b> ISL03A- Red Levanto (M1) + Polished Aluminum (M2) + Pink Portugal (M3) ISL02A- Polished Aluminum (M4) + Red Levanto (M5) ISL01A- Polished Aluminum (M6) + Pink Portugal (M7) <b>P4</b> ISL03A- Black Marquina (M1) + Polished Aluminum (M2) + Red Negrais (M3) ISL02A- Polished Aluminum (M4) + Black Marquina (M5) ISL01A- Polished Aluminum (M6) + Pink Portugal (M7)	<b>P1</b>	
<b>CORD</b>	<b>BK</b> Black	<b>BK</b>	<b>BK</b>
<b>CANOPY AND ANCHORS</b>	<b>AL</b> Polished aluminum	<b>AL</b>	<b>AL</b>
<b>MOUNTING</b>	<b>SM</b> Surface mounted <b>RM</b> Remote driver	<b>SM</b>	
<b>COLOUR TEMPERATURE (CCT)</b>	<b>WL</b> Warm light (2700K) <b>NL</b> Neutral light (3000K) <b>D27</b> Dim to warm (2700K-2200K) <b>D30</b> Dim to warm (3000K-2200K) <b>CCT</b> Other CCT available upon request*	<b>WL</b>	
<b>DIMMING</b>	<b>ZT</b> 0-10V (120VAC only) <b>PH</b> Phase dimming <b>DA</b> DALI (220-240VAC only)	<b>ZT</b>	
<b>FULL SKU</b>		<b>ISL16AP1BKALSMWLZT</b>	
		<b>NOTES</b>	

\*Specific CCT selection only available in 100k increments, from 2200K to 4000K inclusively and not available with Dim-to-Warm feature.

## TESTED DIMMER COMPATIBILITY LIST - 120V

Compatible with ELV dimming (Trailing Edge / Reverse Phase).

We strongly recommend using dimmers that require a Neutral wire connection.

DIMMER BRAND	MODEL	MAX LEVEL	MIN LEVEL	DIMMING PROTOCOL
Lutron	DVELV-300P	95%	5%	Phase Cut
Lutron	DVELV-303P	95%	5%	Phase Cut
Lutron	CTELV-303P	93%	4%	Phase Cut
Lutron	SELV-300P	97%	3%	Phase Cut
Lutron	SELV-303P	97%	3%	Phase Cut
Lutron	MA-PRO / companion (MA-R-WH)	99%	2%	Phase Cut
Lutron	PD-5NE	100%	5%	Phase Cut
Lutron	PD-6WCL	100%	5%	Phase Cut
Lutron	DVRP-253P	94%	3%	Phase Cut
Lutron	CTRP-253P	90%	2%	Phase Cut
Lutron	NTELV-300	94%	2%	Phase Cut

---

Some dimmers require a minimum load, check specifications.

---

We recommend conducting your own test before final installation.

---