



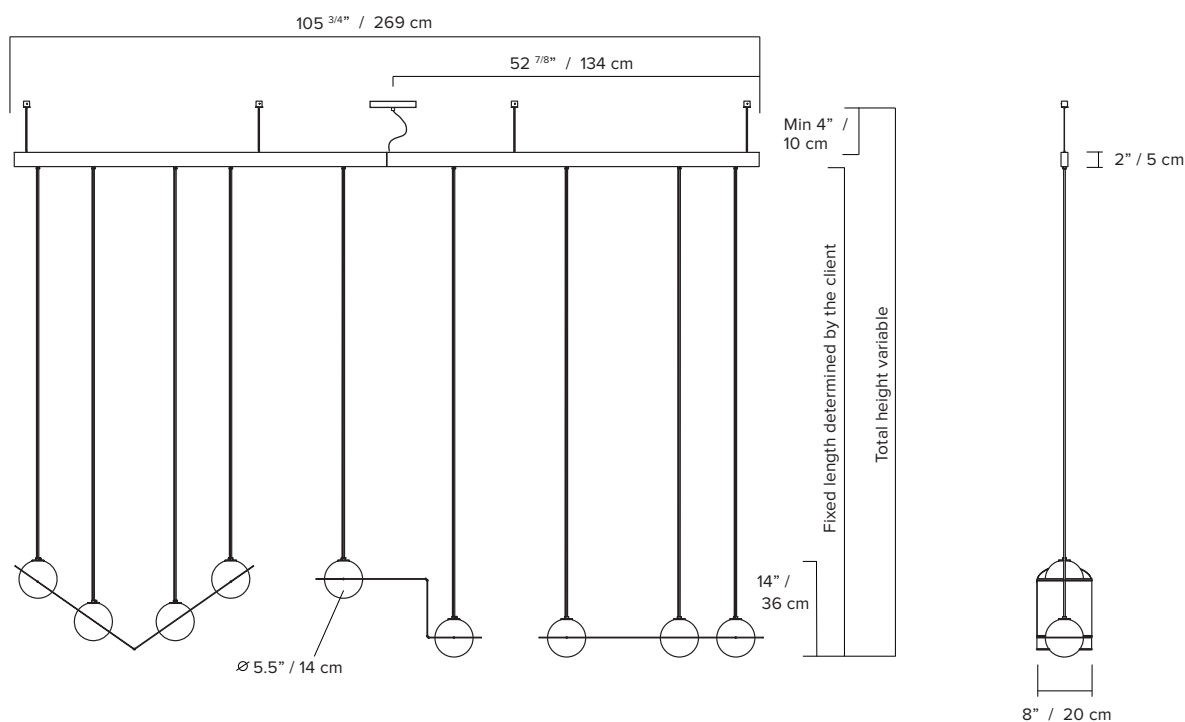




LAURENT 13

The Laurent Collection distills the milk globe to its essential relationship between circle and sphere. A series of thin forms compliment the Laurent globes—forms that carve through space, moving between line, surface, and volume. These forms combine in endless patterns, making it possible for an installation of Laurent lamps to inhabit any space with subtlety and quiet strength.

type:	suspension
construction:	polished brass, powder coated aluminium or nickel plated steel frame handblown opaline glass globe powder coated aluminium or brass hardware polyester cord
specifications:	source: LED lamp provided (G9 base) power consumption: 9x 4,5W lumen output: 2476lm colour temperature: 2700K included * 3000K available upon request colour rendering index: 80 CRI standard * ≥ 90 CRI upon request expected lifetime: 25 000h
control:	refer to our recommended list of dimmer models
cord length:	fixed length to be determined by the client
aircraft cable:	to be determined by the client (adjustable length)- min 4"
weight:	brass/nickel plated: 44.6 lb / 20.2 kg aluminium: 34.5 lb / 15.6 kg
certifications:	    IP20
warranty:	2 years





*dimensions are approximate and may vary slightly


ORDER GUIDE: SKU


COLLECTION		MODEL	FRAME		CORD SYSTEM		PARALLEL BAR		CANOPY/ANCHORS	
LRT	Laurent	13	BK	black	BK	black	BK	black	BK	black
			BR	brass	BR	brass	WH	white	WH	white
			BE	blue	BE	blue	BE	blue	BE	blue
			BU	burgundy	BU	burgundy	BU	burgundy	BU	burgundy
			CH	nickel plated	BG	beige	BG	beige	BG	beige
			TU	turquoise						
LRT		13	BK		BK		BK		BK	= LRT13BKBKBKBK
										example


FRAME



textured
black



brass


textured
blue



textured
burgundy



nickel
plated



textured
turquoise





CORD SYSTEM FINISH
globe holders & cords

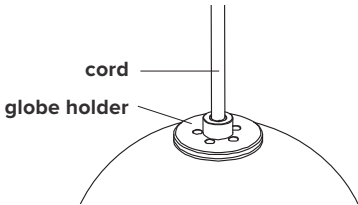

textured
black


brass



textured
blue



textured
burgundy



textured
beige





PARALLEL BAR
black, white or same colour as cord system

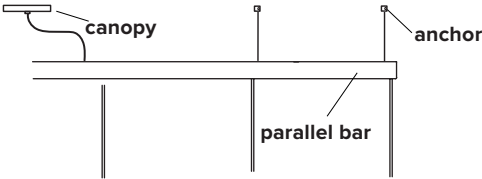

textured
black


textured
white



textured
blue


textured
burgundy


textured
beige




CANOPY and ANCHORS
black, white or same colour as parallel bar


textured
black


textured
white


textured
blue


textured
burgundy


textured
beige

DIMMER SPECIFICATIONS

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

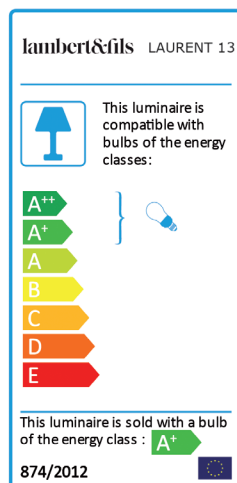
DIMMER BRAND	MODEL NUMBER	MIN LEVEL	MAX LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	0%	100%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	0%	100%	no	very good
LUTRON - SKYLARK	SELV-303P	0%	100%	no	very good
LUTRON - SKYLARK	CTELV-303P	0%	100%	no	very good
LUTRON - DIVA	DVELV-300P	0%	100%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	30%	100%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

DIMMER BRAND	MODEL NUMBER	MIN LEVEL	MAX LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT	V-PRO	2%	100%	no	very good
LEGRAND - NILOÉ	3 996 35	15%	87%	no	good
NIKO	310-0280X	5%	94%	no	very good
NIKO	310-0190X	1%	100%	no	very good

*Other dimmers can yield good results and we recommend conducting your own test before final installation.

EU ENERGY LABEL







NOTES:

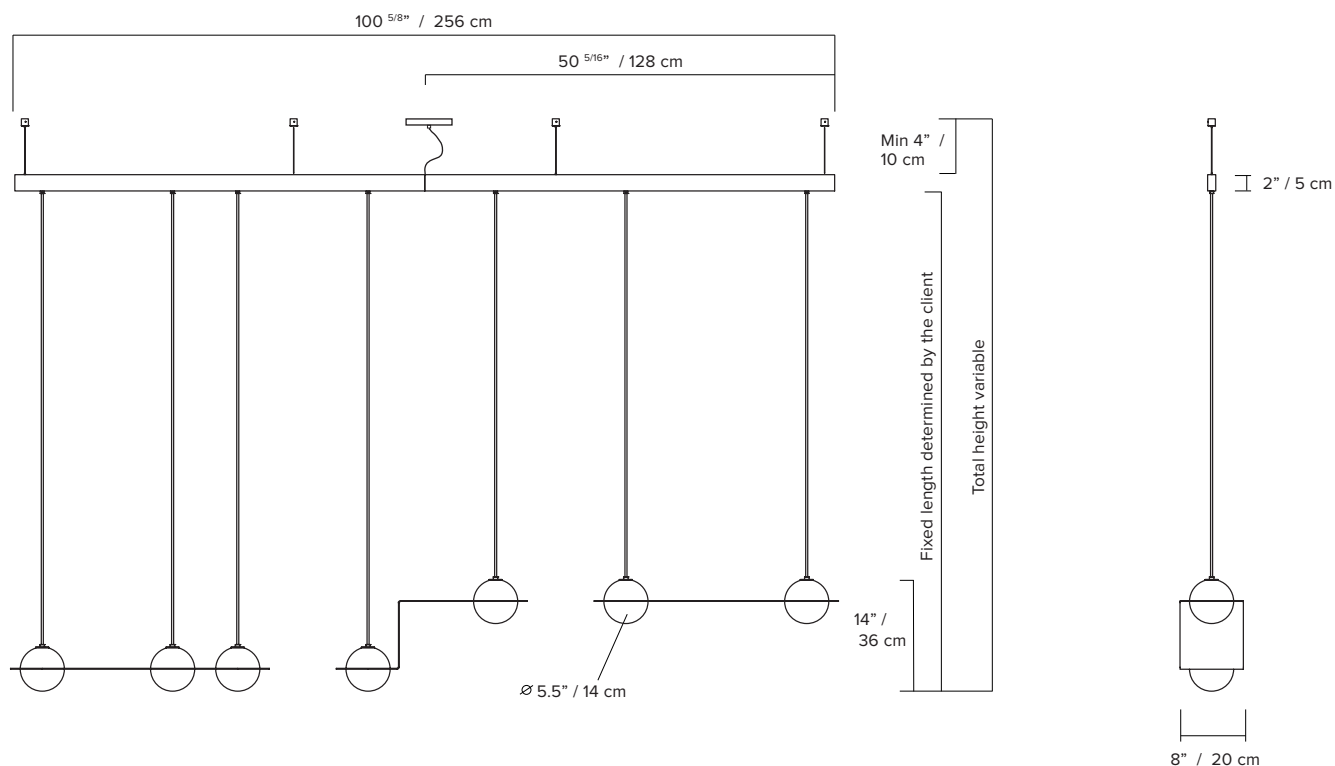
- must be installed by an electrician
- ceiling anchors not meant for slanted ceilings (available upon request)
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on website for cleaning instructions



LAURENT 14

The Laurent Collection distills the milk globe to its essential relationship between circle and sphere. A series of thin forms compliment the Laurent globes—forms that carve through space, moving between line, surface, and volume. These forms combine in endless patterns, making it possible for an installation of Laurent lamps to inhabit any space with subtlety and quiet strength.

type:	suspension
construction:	polished brass, powder coated aluminium or nickel plated steel frame handblown opaline glass globe powder coated aluminium or brass hardware polyester cord
specifications:	source: LED lamp provided (G9 base) power consumption: 7x 4,5W lumen output: 2136lm colour temperature: 2700K included * 3000K available upon request colour rendering index: 80 CRI standard * ≥ 90 CRI upon request expected lifetime: 25 000h
control:	refer to our recommended list of dimmer models
cord length:	fixed length to be determined by the client
aircraft cable:	to be determined by the client (adjustable length)- min 4"
weight:	brass/nickel plated: 39.5 lb / 17.9 kg aluminium: 29.3 lb / 13.3 kg
certifications:	    IP20
warranty:	2 years





*dimensions are approximate and may vary slightly


ORDER GUIDE: SKU


COLLECTION		MODEL	FRAME		CORD SYSTEM		PARALLEL BAR		CANOPY/ANCHORS	
LRT	Laurent	14	BK	black	BK	black	BK	black	BK	black
			BR	brass	BR	brass	WH	white	WH	white
			BE	blue	BE	blue	BE	blue	BE	blue
			BU	burgundy	BU	burgundy	BU	burgundy	BU	burgundy
			CH	nickel plated	BG	beige	BG	beige	BG	beige
			TU	turquoise						
LRT		14	BK		BK		BK		BK	= LRT14BKBKBKBK
										example


FRAME



textured
black



brass


textured
blue



textured
burgundy



nickel
plated



textured
turquoise





CORD SYSTEM FINISH
globe holders & cords

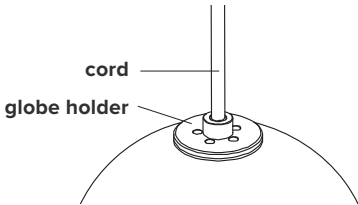

textured
black


brass



textured
blue



textured
burgundy



textured
beige





PARALLEL BAR
black, white or same colour as cord system

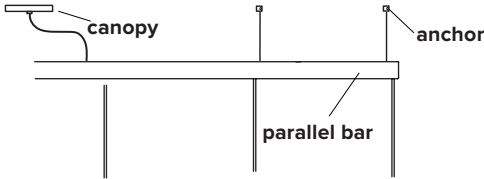

textured
black


textured
white


textured
blue



textured
burgundy



textured
beige





CANOPY and ANCHORS
black, white or same colour as parallel bar


textured
black


textured
white


textured
blue


textured
burgundy


textured
beige

DIMMER SPECIFICATIONS

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

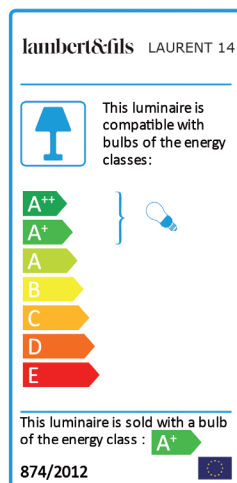
DIMMER BRAND	MODEL NUMBER	MIN LEVEL	MAX LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	0%	100%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	0%	100%	no	very good
LUTRON - SKYLARK	SELV-303P	0%	100%	no	very good
LUTRON - SKYLARK	CTELV-303P	0%	100%	no	very good
LUTRON - DIVA	DVELV-300P	0%	100%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	30%	100%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

DIMMER BRAND	MODEL NUMBER	MIN LEVEL	MAX LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT	V-PRO	2%	100%	no	very good
LEGRAND - NILOÉ	3 996 35	15%	87%	no	good
NIKO	310-0280X	5%	94%	no	very good
NIKO	310-0190X	1%	100%	no	very good

*Other dimmers can yield good results and we recommend conducting your own test before final installation.

EU ENERGY LABEL







NOTES:

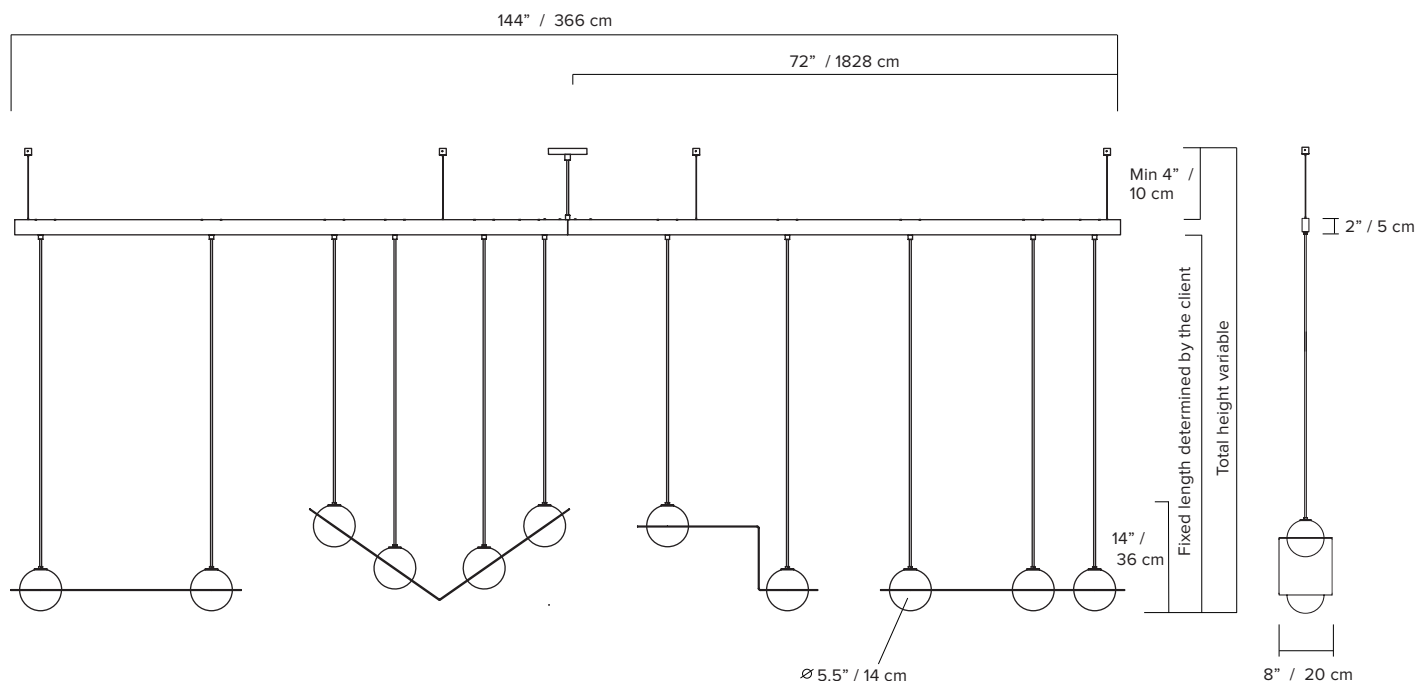
- must be installed by an electrician
- ceiling anchors not meant for slanted ceilings (available upon request)
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on website for cleaning instructions



LAURENT 15

The Laurent Collection distills the milk globe to its essential relationship between circle and sphere. A series of thin forms compliment the Laurent globes—forms that carve through space, moving between line, surface, and volume. These forms combine in endless patterns, making it possible for an installation of Laurent lamps to inhabit any space with subtlety and quiet strength.

type:	suspension
construction:	polished brass, powder coated aluminium or nickel plated steel frame handblown opaline glass globe powder coated aluminium or brass hardware polyester cord
specifications:	source: LED lamp provided (G9 base) power consumption: 11x 4,5W lumen output: 3392lm colour temperature: 2700K included * 3000K available upon request colour rendering index: 80 CRI standard * ≥ 90 CRI upon request expected lifetime: 25 000h
control:	refer to our recommended list of dimmer models
cord length:	fixed length to be determined by the client
aircraft cable:	to be determined by the client (adjustable length)- min 4"
weight:	brass/nickel plated: 57.2 lb / 26 kg aluminium: 43.4 lb / 19.7 kg
certifications:	    IP20
warranty:	2 years





*dimensions are approximate and may vary slightly


ORDER GUIDE: SKU


COLLECTION		MODEL	FRAME		CORD SYSTEM		PARALLEL BAR		CANOPY/ANCHORS	
LRT	Laurent	15	BK	black	BK	black	BK	black	BK	black
			BR	brass	BR	brass	WH	white	WH	white
			BE	blue	BE	blue	BE	blue	BE	blue
			BU	burgundy	BU	burgundy	BU	burgundy	BU	burgundy
			CH	nickel plated	BG	beige	BG	beige	BG	beige
			TU	turquoise						
LRT		15	BK		BK		BK		BK	= LRT15BKBKBKBK
										example


FRAME



textured
black



brass


textured
blue



textured
burgundy



nickel
plated



textured
turquoise





CORD SYSTEM FINISH
globe holders & cords

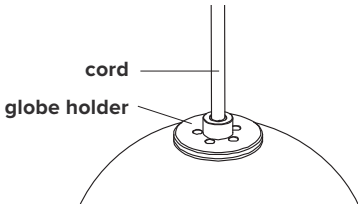

textured
black


brass



textured
blue



textured
burgundy



textured
beige





PARALLEL BAR
black, white or same colour as cord system

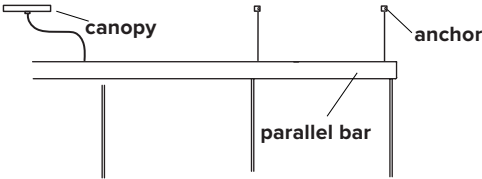

textured
black


textured
white


textured
blue



textured
burgundy


textured
beige




CANOPY and ANCHORS
black, white or same colour as parallel bar


textured
black


textured
white


textured
blue


textured
burgundy


textured
beige

DIMMER SPECIFICATIONS

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

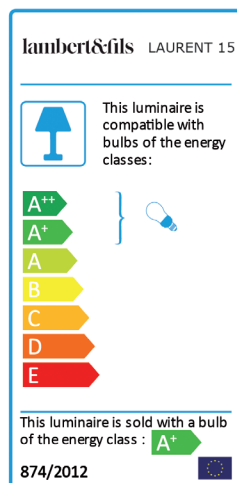
DIMMER BRAND	MODEL NUMBER	MIN LEVEL	MAX LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	0%	100%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	0%	100%	no	very good
LUTRON - SKYLARK	SELV-303P	0%	100%	no	very good
LUTRON - SKYLARK	CTELV-303P	0%	100%	no	very good
LUTRON - DIVA	DVELV-300P	0%	100%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	30%	100%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

DIMMER BRAND	MODEL NUMBER	MIN LEVEL	MAX LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT	V-PRO	2%	100%	no	very good
LEGRAND - NILOÉ	3 996 35	15%	87%	no	good
NIKO	310-0280X	5%	94%	no	very good
NIKO	310-0190X	1%	100%	no	very good

*Other dimmers can yield good results and we recommend conducting your own test before final installation.

EU ENERGY LABEL







NOTES:

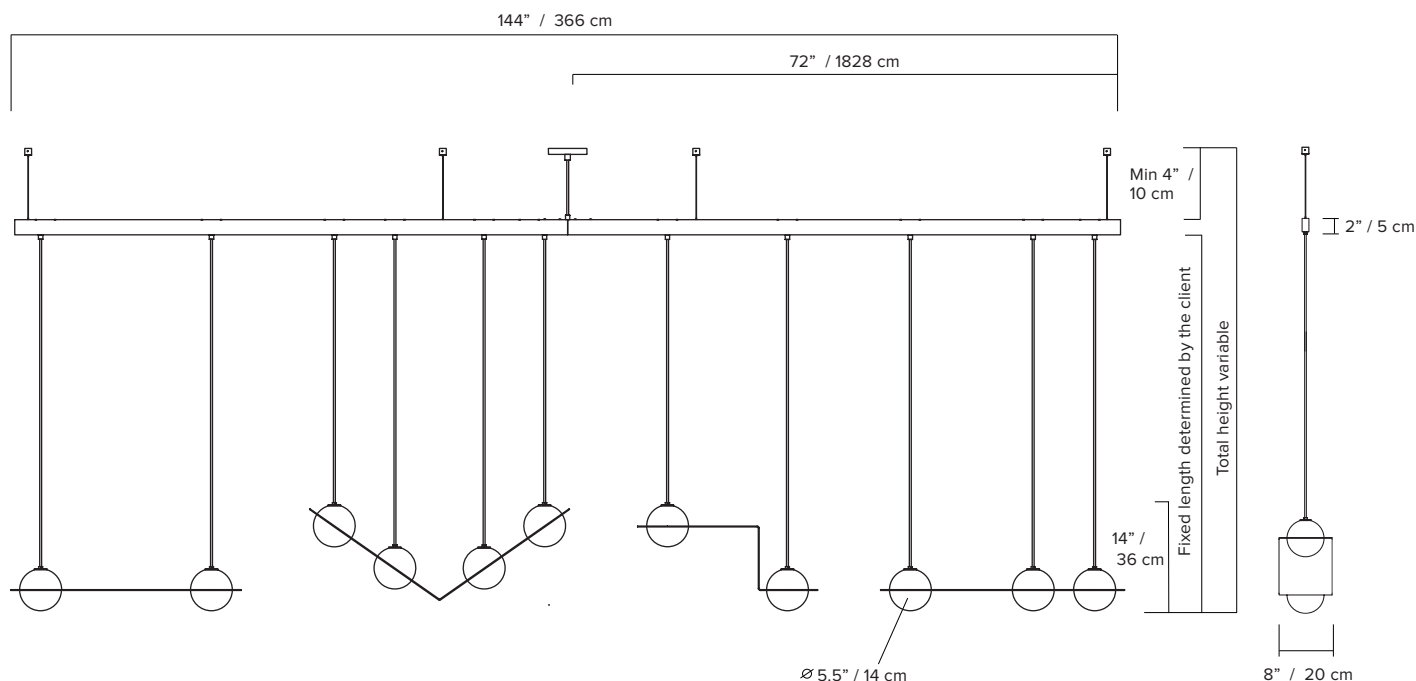
- must be installed by an electrician
- ceiling anchors not meant for slanted ceilings (available upon request)
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on website for cleaning instructions



LAURENT 15

The Laurent Collection distills the milk globe to its essential relationship between circle and sphere. A series of thin forms compliment the Laurent globes—forms that carve through space, moving between line, surface, and volume. These forms combine in endless patterns, making it possible for an installation of Laurent lamps to inhabit any space with subtlety and quiet strength.

type:	suspension
construction:	polished brass, powder coated aluminium or nickel plated steel frame handblown opaline glass globe powder coated aluminium or brass hardware polyester cord
specifications:	source: LED lamp provided (G9 base) power consumption: 11x 4,5W lumen output: 3392lm colour temperature: 2700K included * 3000K available upon request colour rendering index: 80 CRI standard * ≥ 90 CRI upon request expected lifetime: 25 000h
control:	refer to our recommended list of dimmer models
cord length:	fixed length to be determined by the client
aircraft cable:	to be determined by the client (adjustable length)- min 4"
weight:	brass/nickel plated: 57.2 lb / 26 kg aluminium: 43.4 lb / 19.7 kg
certifications:	    IP20
warranty:	2 years





*dimensions are approximate and may vary slightly


ORDER GUIDE: SKU


COLLECTION		MODEL	FRAME		CORD SYSTEM		PARALLEL BAR		CANOPY/ANCHORS	
LRT	Laurent	15	BK	black	BK	black	BK	black	BK	black
			BR	brass	BR	brass	WH	white	WH	white
			BE	blue	BE	blue	BE	blue	BE	blue
			BU	burgundy	BU	burgundy	BU	burgundy	BU	burgundy
			CH	nickel plated	BG	beige	BG	beige	BG	beige
			TU	turquoise						
LRT		15	BK		BK		BK		BK	= LRT15BKBKBKBK
										example


FRAME



textured
black



brass


textured
blue



textured
burgundy



nickel
plated



textured
turquoise





CORD SYSTEM FINISH
globe holders & cords

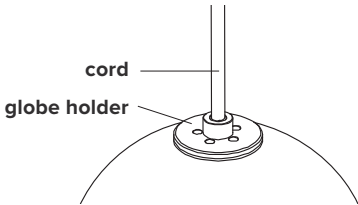

textured
black


brass



textured
blue



textured
burgundy



textured
beige





PARALLEL BAR
black, white or same colour as cord system

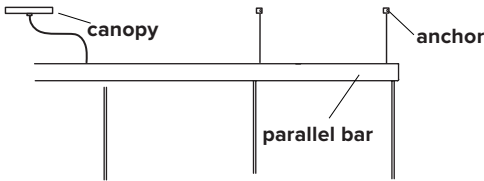

textured
black


textured
white



textured
blue


textured
burgundy



textured
beige



CANOPY and ANCHORS
black, white or same colour as parallel bar


textured
black


textured
white


textured
blue


textured
burgundy


textured
beige

DIMMER SPECIFICATIONS

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

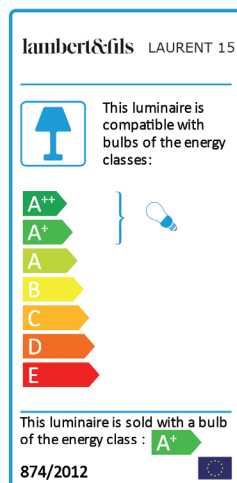
DIMMER BRAND	MODEL NUMBER	MIN LEVEL	MAX LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	0%	100%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	0%	100%	no	very good
LUTRON - SKYLARK	SELV-303P	0%	100%	no	very good
LUTRON - SKYLARK	CTELV-303P	0%	100%	no	very good
LUTRON - DIVA	DVELV-300P	0%	100%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	30%	100%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

DIMMER BRAND	MODEL NUMBER	MIN LEVEL	MAX LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT	V-PRO	2%	100%	no	very good
LEGRAND - NILOÉ	3 996 35	15%	87%	no	good
NIKO	310-0280X	5%	94%	no	very good
NIKO	310-0190X	1%	100%	no	very good

*Other dimmers can yield good results and we recommend conducting your own test before final installation.

EU ENERGY LABEL







NOTES:

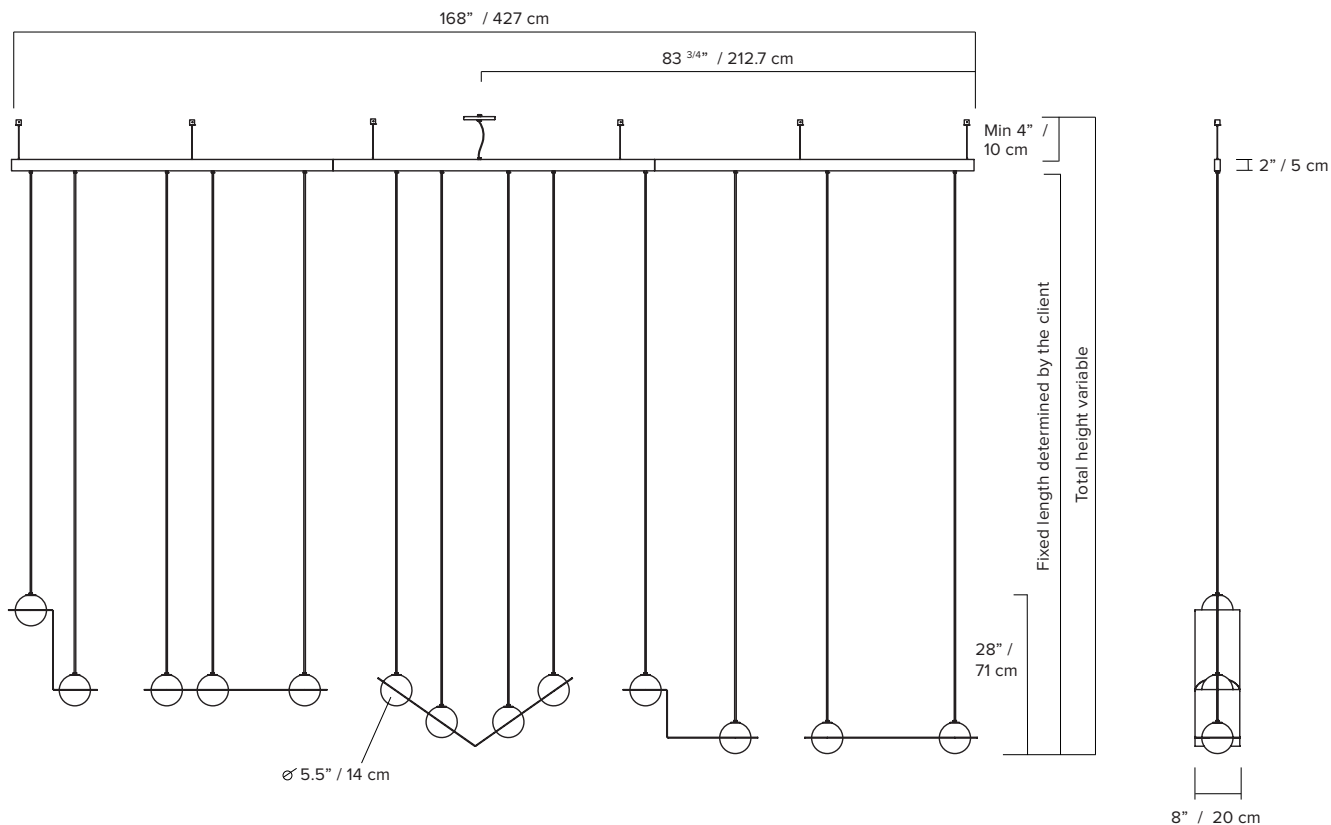
- must be installed by an electrician
- ceiling anchors not meant for slanted ceilings (available upon request)
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on website for cleaning instructions



LAURENT 17

The Laurent Collection distills the milk globe to its essential relationship between circle and sphere. A series of thin forms compliment the Laurent globes—forms that carve through space, moving between line, surface, and volume. These forms combine in endless patterns, making it possible for an installation of Laurent lamps to inhabit any space with subtlety and quiet strength.

type:	suspension
construction:	polished brass, powder coated aluminium or nickel plated steel frame handblown opaline glass globe powder coated aluminium or brass hardware polyester cord
specifications:	source: LED lamp provided (G9 base) power consumption: 13x 4,5W lumen output: 4008 lm colour temperature: 2700K included * 3000K available upon request colour rendering index: 80 CRI standard * ≥ 90 CRI upon request expected lifetime: 25 000h
control:	refer to our recommended list of dimmer models
cord length:	fixed length to be determined by the client
aircraft cable:	to be determined by the client (adjustable length)- min 4"
weight:	brass/nickel plated: 68.1 lb / 30.8 kg aluminium: 51.1 lb / 23.2 kg
certifications:	    IP20
warranty:	2 years





*dimensions are approximate and may vary slightly


ORDER GUIDE: SKU


COLLECTION		MODEL	FRAME		CORD SYSTEM		PARALLEL BAR		CANOPY/ANCHORS	
LRT	Laurent	17	BK	black	BK	black	BK	black	BK	black
			BR	brass	BR	brass	WH	white	WH	white
			BE	blue	BE	blue	BE	blue	BE	blue
			BU	burgundy	BU	burgundy	BU	burgundy	BU	burgundy
			CH	nickel plated	BG	beige	BG	beige	BG	beige
			TU	turquoise						
LRT		17	BK		BK		BK		BK	= LRT17BKBKBKBK
										example


FRAME



textured
black



brass


textured
blue



textured
burgundy



nickel
plated



textured
turquoise





CORD SYSTEM FINISH
globe holders & cords

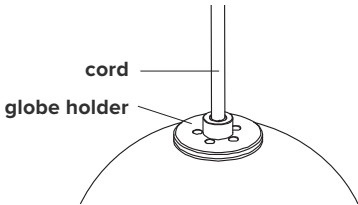

textured
black


brass



textured
blue



textured
burgundy



textured
beige





PARALLEL BAR
black, white or same colour as cord system

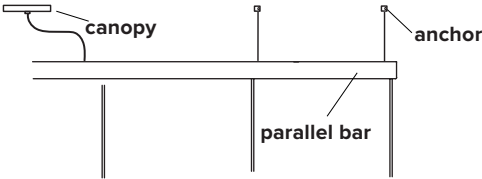

textured
black


textured
white



textured
blue


textured
burgundy


textured
beige





CANOPY and ANCHORS
black, white or same colour as parallel bar


textured
black


textured
white


textured
blue


textured
burgundy


textured
beige

DIMMER SPECIFICATIONS

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

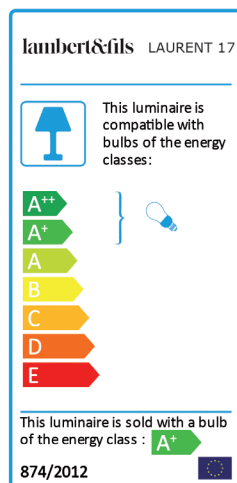
DIMMER BRAND	MODEL NUMBER	MIN LEVEL	MAX LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	0%	100%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	0%	100%	no	very good
LUTRON - SKYLARK	SELV-303P	0%	100%	no	very good
LUTRON - SKYLARK	CTELV-303P	0%	100%	no	very good
LUTRON - DIVA	DVELV-300P	0%	100%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	30%	100%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

DIMMER BRAND	MODEL NUMBER	MIN LEVEL	MAX LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT	V-PRO	2%	100%	no	very good
LEGRAND - NILOÉ	3 996 35	15%	87%	no	good
NIKO	310-0280X	5%	94%	no	very good
NIKO	310-0190X	1%	100%	no	very good

*Other dimmers can yield good results and we recommend conducting your own test before final installation.

EU ENERGY LABEL



NOTES:

- must be installed by an electrician
- ceiling anchors not meant for slanted ceilings (available upon request)
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on website for cleaning instructions