

PH 80 FLOOR LAMP


, , Designed by Poul Henningsen

Type:

Product:

Project:

Modified:

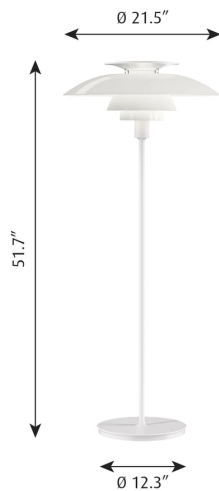

Technical specifications

Materials
Shades: High pressure molded white opal acrylic. Top reflector: Red or White polycarbonate. Top cover and base: Black or white, high pressure molded ABS. Stand: High lustre chrome plated or black or white, powder coated, steel.

Finishes
White opal shades.

High Lustre Chrome Plated stand with black base, white stand with white base or black stand with black base.

Mounting
9'. Cord with plug.

On/off or dimmer foot switch provided. For mounting instructions, see download section on the product detail page.

Information
Electrical:
System Wattage: 70W
Delivered lumens: 572 lm
Efficacy: <10 lm/W
Certifications:
cULus, Dry Location
Protection class IP20
Color Rendering: Ra≥90
Actual performance dependent upon screw-base lamp used. For the E-socket product variants, bulbs are not included. LED light source is part of the product.

Variant Options For particular variant options, please check our online Product Variants Configurator on the product detail page.

VARIANT NO.	LIGHT SOURCE	VOLTAGE/FREQ	DELIVERED LUMEN	FEATURES	CABLE	COLOR, RAL	W / H / L (IN) / W (LB)
-------------	--------------	--------------	-----------------	----------	-------	------------	-------------------------

PH 80 FLOOR LAMP

, , Designed by Poul Henningsen

10000157283	1 × A-21 bulb (medium base) (70 W max)	120V/60HZ	1143	-	White cord	WHT, 036	21.7 / 51.8 / 21.7 in / 16.3 lb
10000157285	1 × A-21 bulb (medium base) (70 W max)	120V/60HZ	1143	-	Black cord	BLK, 722	21.7 / 51.8 / 21.7 in / 16.3 lb
5744920182	1 × A-21 bulb (medium base) (70 W max)	120V/60HZ		-	Black cord	WHT OPAL ACRYL, 970	- / - / - in / 17.7 lb