

# LAURENT 11








Ceiling




Wall

The Laurent Collection distills the milk globe to its essential relationship between circle and sphere. A series of thin forms compliment the Laurent globes—forms that carve through space, moving between line, surface, and volume. These forms combine in endless patterns, making it possible for an installation of Laurent lamps to inhabit any space with subtlety and quiet strength.

<b>TYPE</b>	Wall and ceiling
<b>CONSTRUCTION</b>	Handblown opaline glass globe Polished or powder coated aluminium, or brass body
<b>SPECIFICATIONS</b>	Source: LED lamp provided (G9 base) Power consumption: 4.5W Lumen output: 319lm  Colour temperature: 2700K included * 3000K available upon request Colour rendering index: $\geq 90$ CRI standard Expected lifetime: $\geq 25\,000$ h
<b>CONTROL</b>	Refer to our recommended list of dimmer models
<b>WEIGHT</b>	1.8 lb / 0.8 kg
<b>CERTIFICATIONS</b>	     IP20
<b>WARRANTY</b>	2 years

## NOTES

- Luminaire must be installed over a junction box for connection purposes. Please consult installation manual for more details.
- Dimensions are approximate and may vary slightly

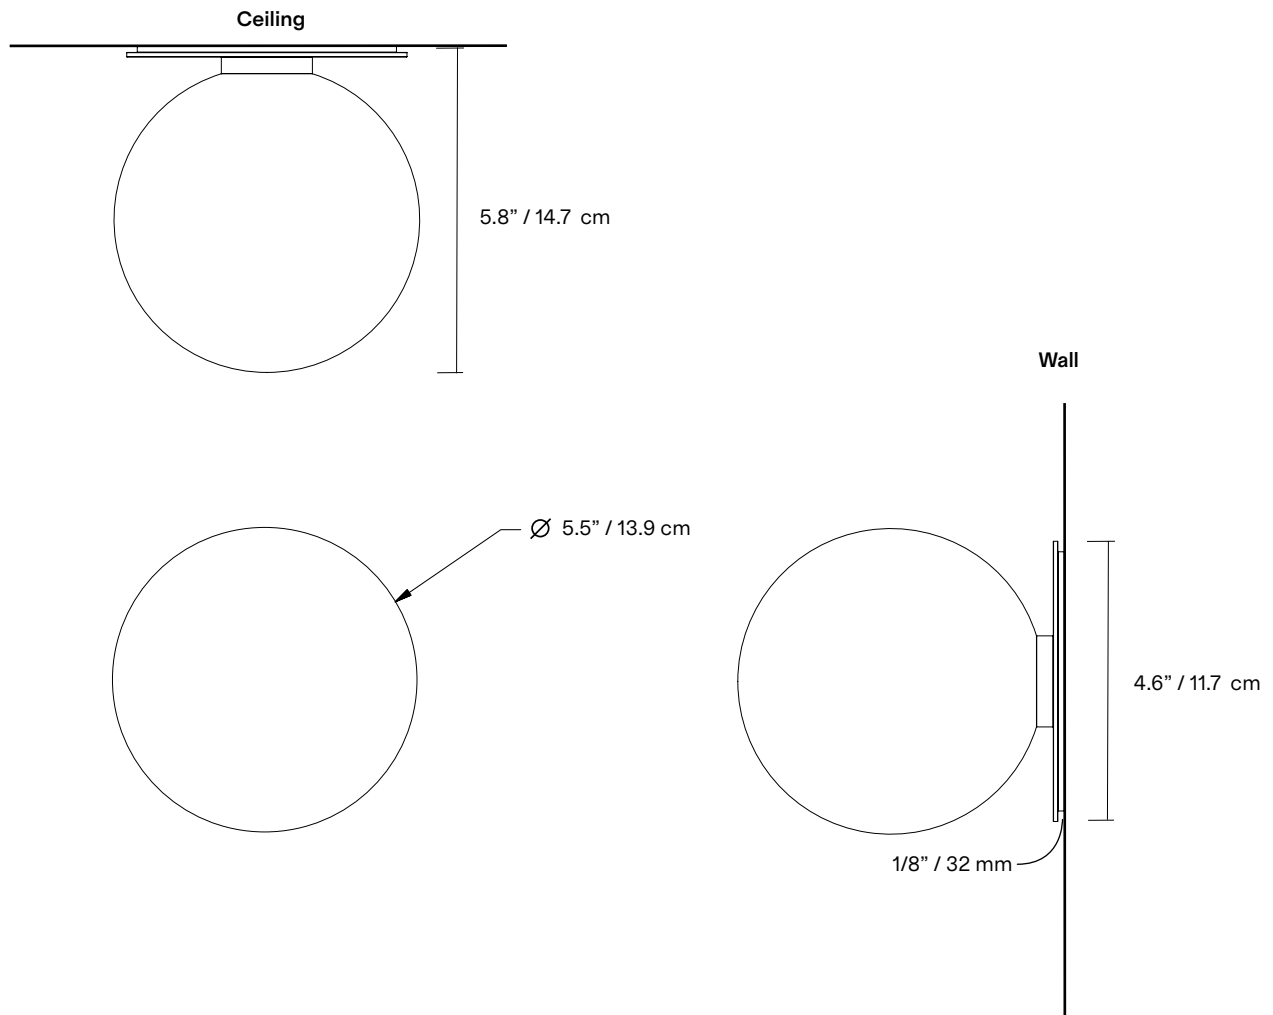

## FINISH



**AL**  
Polished  
aluminum



**BG**  
Textured  
Beige



**BK**  
Textured  
Black



**BE**  
Textured  
Blue



**BR**  
Brass




**BU**  
Textured  
Burgundy



**WH**  
Textured  
White

## LAMP ANATOMY

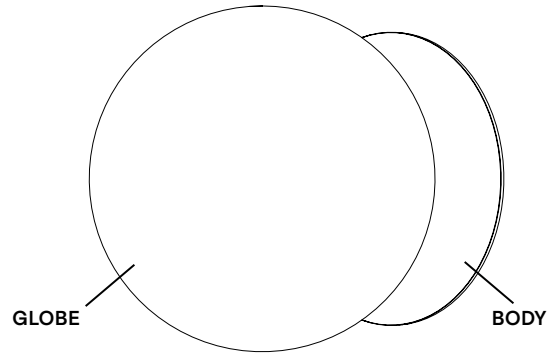

		Example	Fill with your selection
<b>COLLECTION</b>	<b>LRT</b> Laurent	<b>LRT</b>	<b>LRT</b>
<b>MODEL</b>	<b>11</b>	<b>11</b>	<b>11</b>
<b>BODY</b>	<b>AL</b> Aluminum <b>BG</b> Textured Beige <b>BK</b> Textured Black <b>BE</b> Textured Blue <b>BR</b> Brass <b>BU</b> Textured Burgundy <b>WH</b> Textured White	<b>BK</b>	
<b>FULL SKU</b>		<b>LRT11BK</b>	
		<b>NOTES</b>	

\*Custom colour available upon request. Material library on website.

## NOTES

- Not protected against liquids (refer to IP20)
- Additional charges for modifications or for special orders
- Please refer to maintenance sheet on our website for cleaning instructions

## DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL	MAX LEVEL	MIN LEVEL	DIMMING PROTOCOL
LUTRON - MAESTRO	MAELV-600	100%	0%	Phase Cut
LUTRON - SKYLARK	SELV-300P	100%	0%	Phase Cut
LUTRON - SKYLARK	SELV-300P	100%	0%	Phase Cut
LUTRON - SKYLARK	CTELV-303P	100%	0%	Phase Cut
LUTRON - DIVA	DVELV-300P	100%	0%	Phase Cut
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	Phase Cut

## DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

Phase cut dimming (leading edge or trailing edge\*\*)

DIMMER BRAND	MODEL	MAX LEVEL	MIN LEVEL	DIMMING PROTOCOL
VARILIGHT	V-PRO	100%	2%	Phase Cut
LEGRAND - NILOÉ	3 996 35	87%	15%	Phase Cut
NIKO	310-0280X	94%	5%	Phase Cut
NIKO	310-0190X	100%	1%	Phase Cut

\*Other dimmers can yield good results and we recommend conducting your own test before final installation.

---

Some dimmers require a minimum load, check specifications.

---

\*Other dimmers that specify LED lamp compatibility may operate without issue.

---

We recommend conducting your own test before final installation.

---

\*\*Leading edge is also known as TRIAC or Forward Phase.

---

Trailing edge is also known as ELV or Reverse Phase.

---