

Ipoli 12



12 (length A)




12 (length B)

Ipoli is a decorative multifunctional collection centered on the movement of playful swiveling heads atop a slender base. The collection draws inspiration from the design tradition of utilitarian, streamlined task lamps and office lighting, while enfoldng Lambert & Fils' unique twist, both poetic and sturdy. Whether employed as a task light, ambient accent, or focal point, each piece will delight any space.

TYPE	Wall - Hardwire (HW) or softwire (SW)
CONSTRUCTION	Tumbled or powder coated aluminum body, head and cover plate Frosted opal acrylic lens Vinyl cord (SW)
SPECIFICATIONS	Power consumption Touch dimmer (SW only): 8W Remote driver: 7W Colour temperature: 3000K 2700K 2200K dim to warm 3000K to 2200K dim to warm 2700K to 2200K Lumen output: Touch dimmer SW: 200 lumen Remote driver: 230 lumen Colour rendering index: ≥90 CRI Colour consistency: 3 SDCM Expected lifetime: ≥50 000h
CONTROL	Touch Dimmer: 100 to 240V, touch dimmer only Remote Driver 120/277V on/off, 0-10V, or phase dimming (120V only) 220-240V: On/Off, Phase Dimming, DALI
CORD LENGTH (SW)	70" / 178 cm
WEIGHT	12 length A: 3.1lb / 1.4kg 12 length B: 3.4lb / 1.5kg
WARRANTY	2 years



NOTES

- Dimensions are approximate and may vary slightly
- **Remote Driver:** Touch dimmer not available. Driver provided. Driver housing not included for UL.
 - Driver does not fit in a standard octagonal jbox.


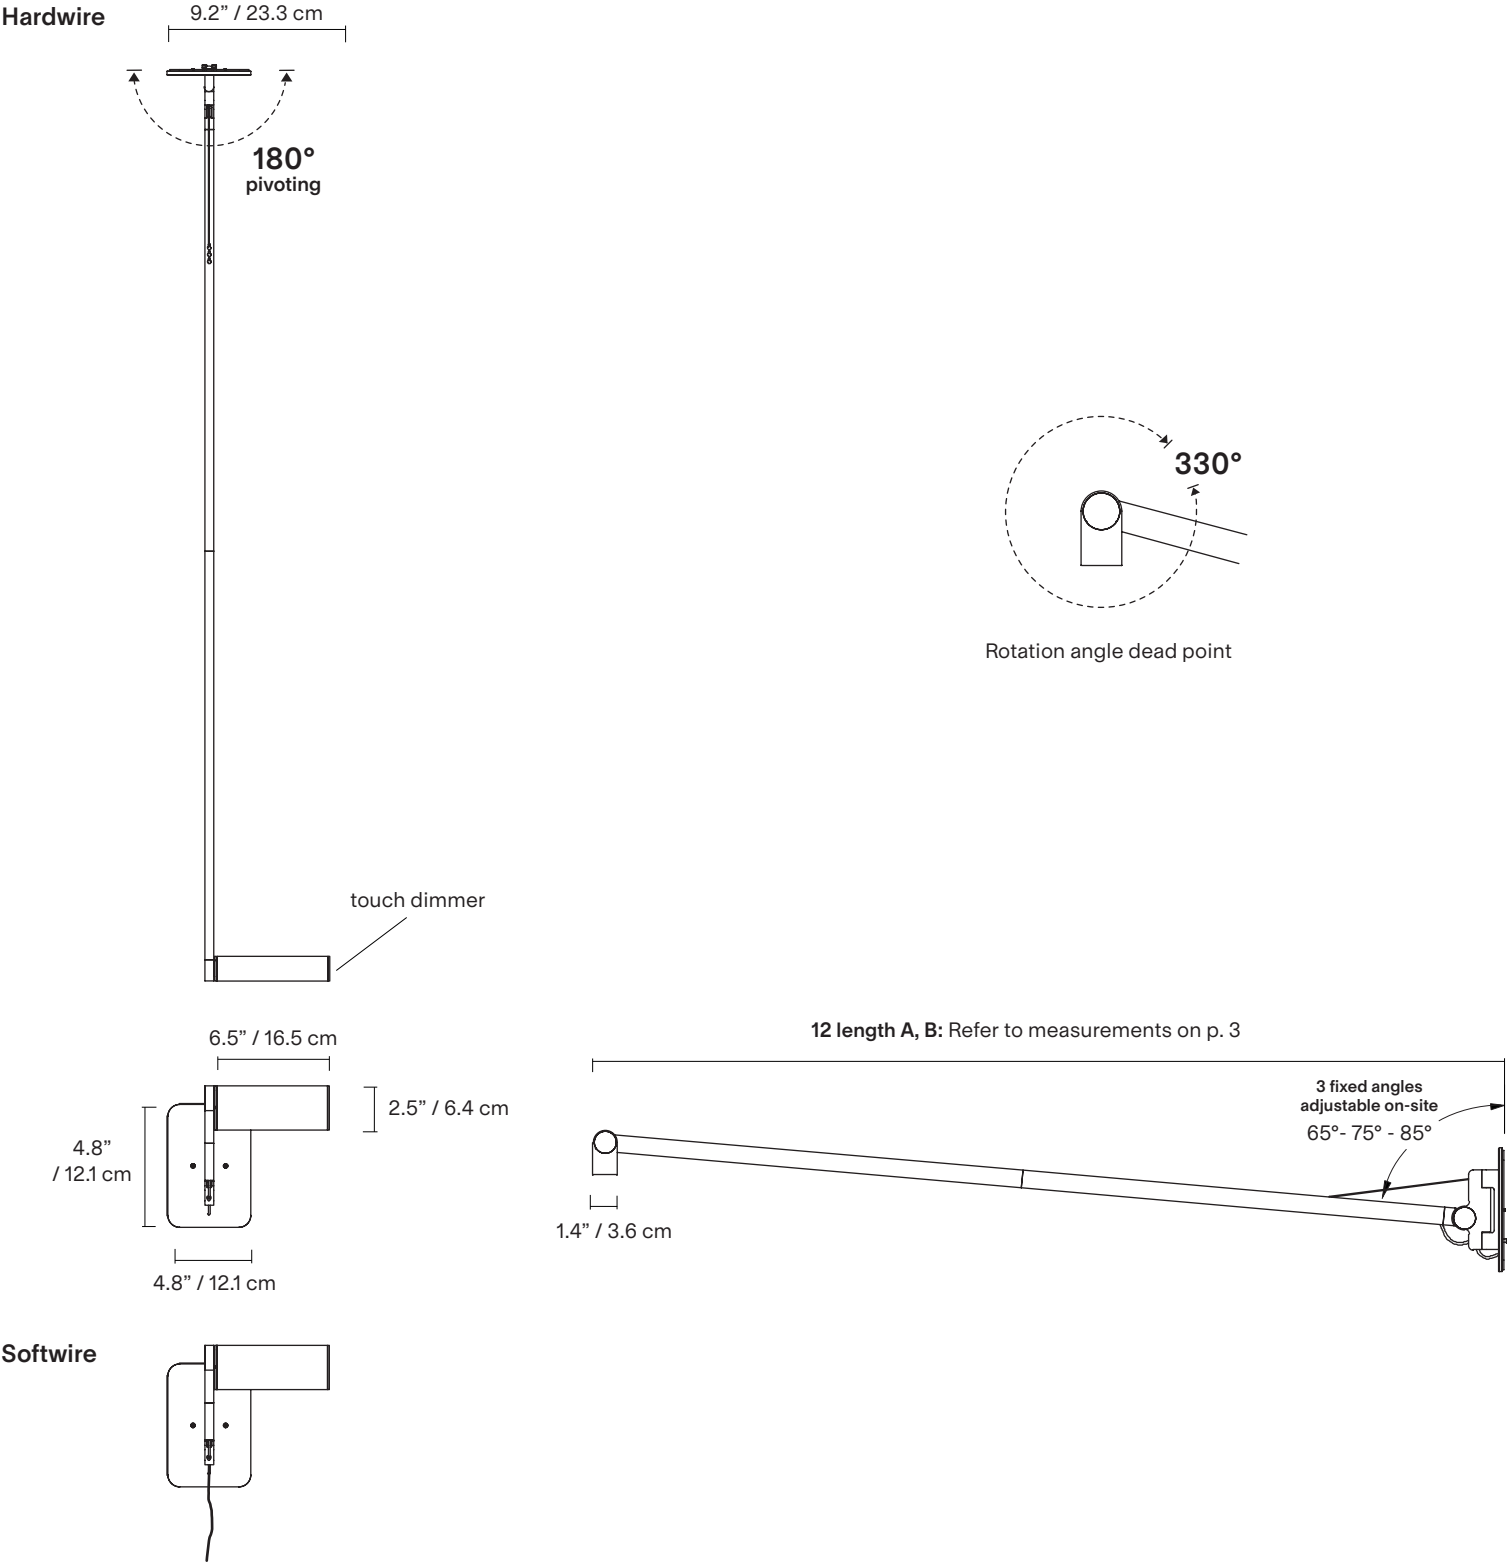


Spec Drawings

Ipoli 12 length A - 3 fixed angles adjustable on-site

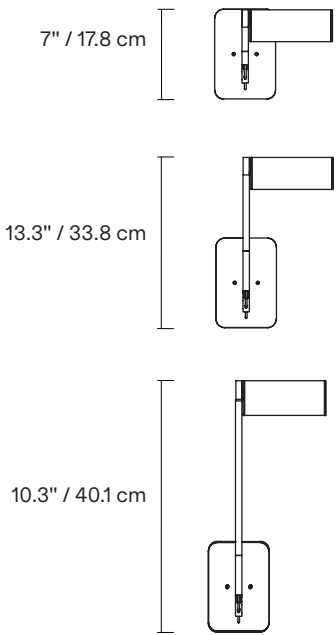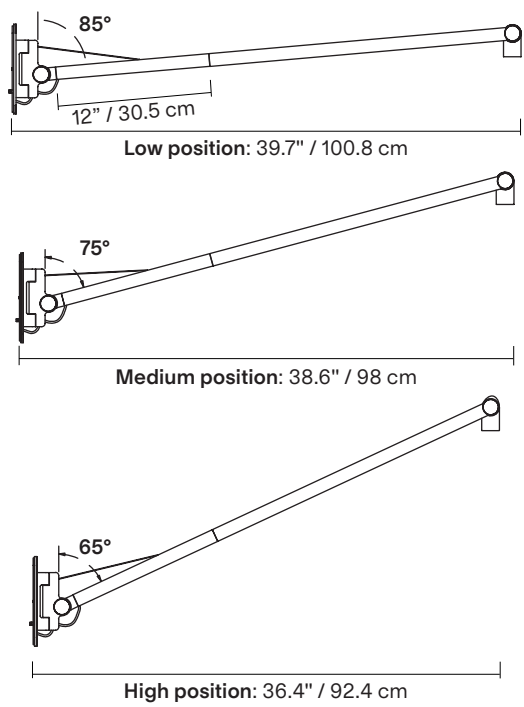

Ipoli 12 length B - 3 fixed angles adjustable on-site

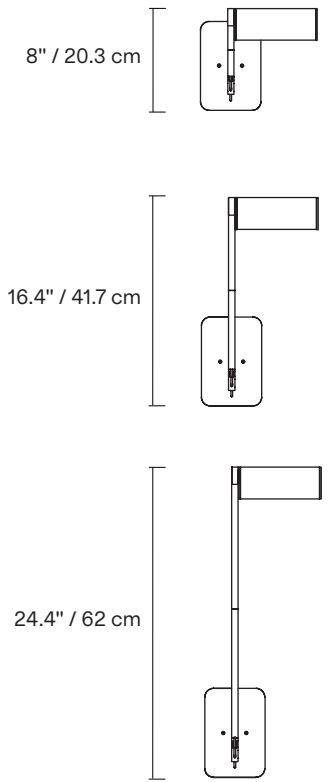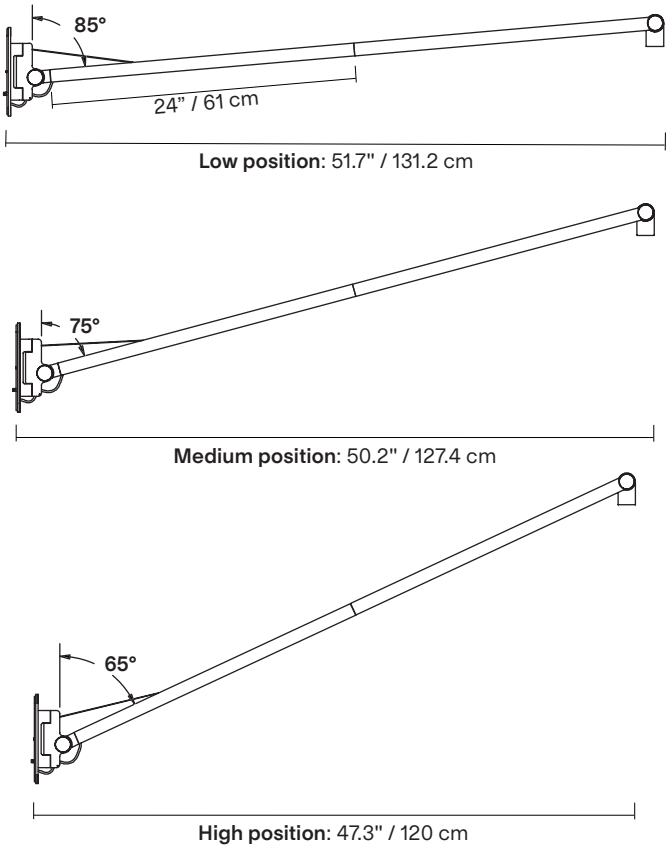

FINISH



BG
Textured
beige



BK
Textured
black




PP
Textured
poppy




TA
Tumbled
aluminum

HEAD ORIENTATION
(WHEN FACING LUMINAIRE)



Right side




Left side

NOTES


- Must be installed by an electrician (HW version only)
- Cord always black SW and HW
- LED may only be changed by Lambert & Fils or other authorized personnel
- Not protected against liquids (refer to IP20)
- Additional charges for modifications or for special orders
- Please refer to maintenance sheet on our website for cleaning instructions

LAMP ANATOMY

Hardwire

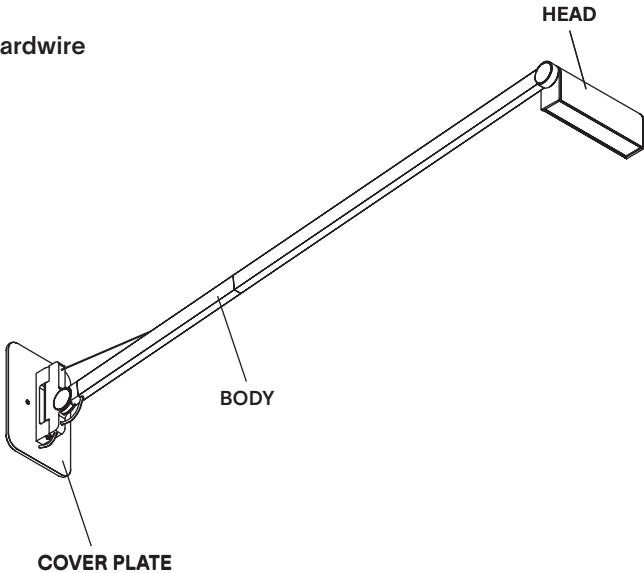

Softwire

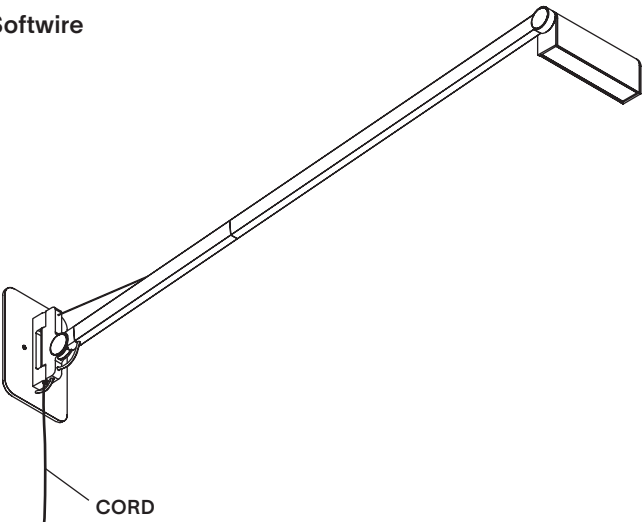


TOUCH DIMMER

Do not install on a dimmer switch.

			Example	Fill with your selection
COLLECTION	IPO Ipoli		IPO	IPO
MODEL	12		12	12
CONFIGURATION	TO	Touch Dimmer	TO	TO
INSTALLATION	SW	Softwire	SW	
FINISH	BG	Textured beige	BG	
	BK	Textured black		
	PP	Textured poppy		
	TA	Tumbled aluminum*		
	CC	Custom colour**		
TOTAL LENGTH	A		A	
HEAD ORIENTATION	B			
	L	Left side	L	
	R	Right side		
CORD	BK	Black	BK	BK
COLOUR TEMPERATURE (CCT)	F22	Fixed 2200K	F22	
	F27	Fixed 2700K		
FULL SKU			IPO12TOSWBGALBKF22	
			NOTES	

*Tumbled aluminum finish is protected against fingerprints and stains.
**Custom colour available upon request. Material library on website.

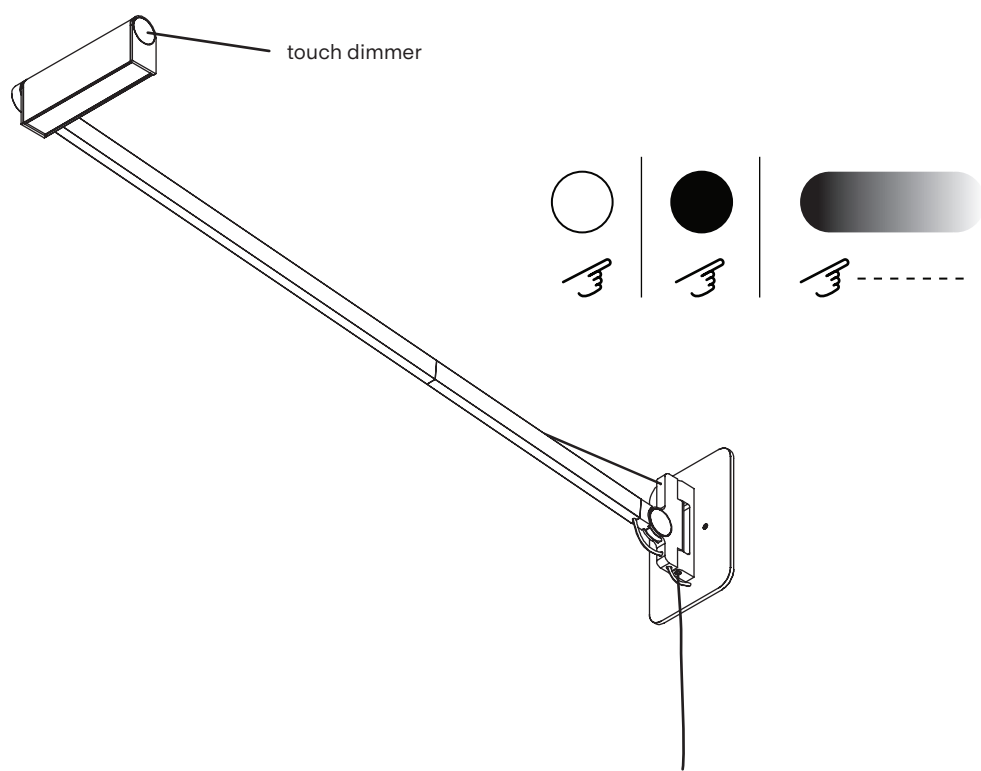

REMOTE DRIVER

Touch dimmer not available. Driver provided. Driver housing not included for UL.

		Example	Fill with your selection
COLLECTION	IPO Ipoli	IPO	IPO
MODEL	12	12	12
CONFIGURATION	RM Remote Driver	RM	RM
INSTALLATION	HW Hardwire	HW	HW
FINISH	BG Textured beige BK Textured black PP Textured poppy TA Tumbled aluminum* CC Custom colour**	BG	
TOTAL LENGTH	A B	A	
HEAD ORIENTATION	L Left side R Right side	L	
COLOUR TEMPERATURE (CCT)	F22 Fixed 2200K F27 Fixed 2700K F30 Fixed 3000K D27 Dim to warm 2700K-2200K D30 Dim to warm 3000K-2200K CCT Other CCT available upon request***	F22	
DIMMING	ZT 0-10V (120VAC only) PH Phase dimming DA DALI (220-240VAC only)	ZT	
FULL SKU		IPO12RMHWBGALF22ZT	
		NOTES	

*Tumbled aluminum finish is protected against fingerprints and stains.
**Custom colour available upon request. Material library on website.
***Specific CCT selection only available in 100k increments, from 2200K to 4000K inclusively and not available with Dim-to-Warm feature.

